

**UK**

## Crossover Valve Combinations

DIN: 15 - 500 / PN 10 - 40

ASME: NPS 1/2" - 20" / class 150 300

PT range:  $-30 < T < 230/280^{\circ}\text{C}$ , vacuum 10-8 mbar







## Design Features

### Design Characteristics

- all types of AZ-valves combinable
- for cooling and heating cycles
- for pump cycles
- for safety-valves
- for filter-cycles
- for reactor cycles
- available hand-operated, gear-operated and with actuators

**Sample**

**applications**

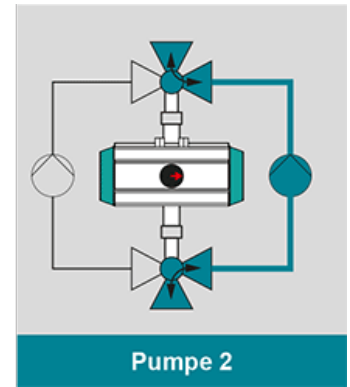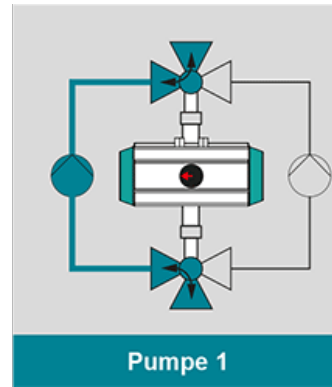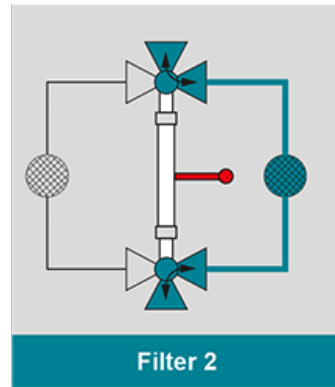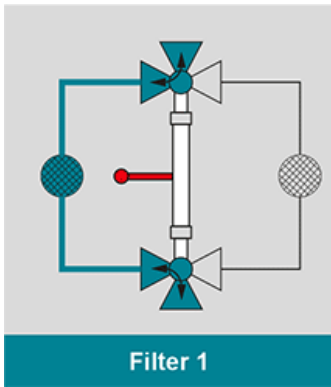


### Filter-cycle

Replacement or cleaning of filter is possible without any problems by application of AZ-crossover-valve-combinations. When filter 1 is blocked up the valve combination is switched over to flow consequently regulated by filter 2. Therefore it is possible to replace the filter 1 without interruption of the continuous flow. If "LL"- plug is used moreover a continuous flow during the phase of switching is guaranteed. In this case a complete closing during switching is not possible. **Pump-cycle**

On break-down of pump 1 an easy replacement of pump 1 is possible by switching the valve combination to pump 2 without interruption of the continuous flow. If "LL"- plug is used moreover a continuous flow during the phase of switching is guaranteed. In this case a complete closing during switching is not possible.

### PT-Diagram

General Pressure-Temperature-Diagram

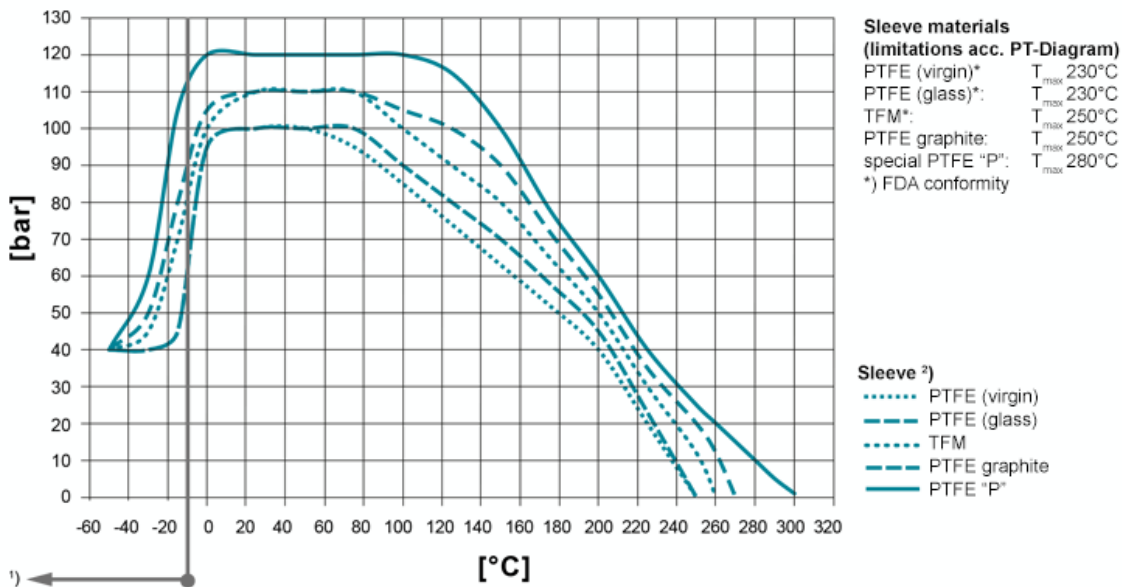

**Operating temperatures  $< -30^{\circ}\text{C}$  and  $> 220^{\circ}\text{C}$  have to be checked and approved by AZ according to the operating conditions.** Besides the P/T value of the sleeve the limitations of the valve bodies also have to be considered. Please refer to the EN 12516-1 resp. ASME B16.34 in order to choose a proper pressure rating (PN/class). The shown values refer to austenitic stainless steel 1.4408 (A351 Gr. CF8M). 1) For operating temperatures below  $-10^{\circ}\text{C}$  low temperature / austenitic steels are required.

2) Sleeve: There are different sleeve materials / compounds available.

## Materials

### Standard body materials

- Carbon Steel 1.0619, ASTM A216 WCB
- Stainless Steel 1.4408, ASTM A351 CF8M
- Stainless Steel 1.4308, ASTM A351 CF8
- Unalloyed stainless steel casting (low Temp.) 1.1138, LCC/LCB/A352
- Stainless Steel 1.4408, ASTM A351 CF8M
- Stainless Steel 1.4308, ASTM A351 CF8

### Standard plug materials

- Alloy
- Monel
- Nickel
- Zirconium
- Titan
- Tantal
- other materials on request

## Sealing Systems

Standard sealing for all major applications;

Tmax 230°C

### Type STD

[read more \[...\]](#)

Firesafe sealing (API 607) with graphite packing for additional stem sealing; Tmax 230°C

### Type FS

[read more \[...\]](#)

Chemical sealing to prevent fugitive emission of aggressive and toxic media with PTFE packing for additional stem sealing;

T<sub>max</sub> 230°C

### Type CA

[read more \[...\]](#)

Firesafe safety sealing (API 607) for fluctuating temperatures

with 3x graphite packing (adjustable) for additional stem sealing; Tmax 280°C

### Type FSN

[read more \[...\]](#)

Firesafe safety sealing (API 607) for fluctuating temperatures

with 3x graphite packing (live loaded disc springs) for additional stem sealing; Tmax 280°C

### Type FSN-SL

[read more \[...\]](#)

Chemical safety sealing for fluctuating temperatures with 3x PTFE packing (adjustment) for additional stem sealing;

Tmax 230°C

### Type CASN

[read more \[...\]](#)





Chemical safety sealing for fluctuation temperatures  
with 3x PTFE packing (live loaded disc springs) for additional  
stem sealing; Tmax 230°C

## Type CASN-SL

[read more \[...\]](#)


## Port Forms

Order the desired combination, port form select by AZ.

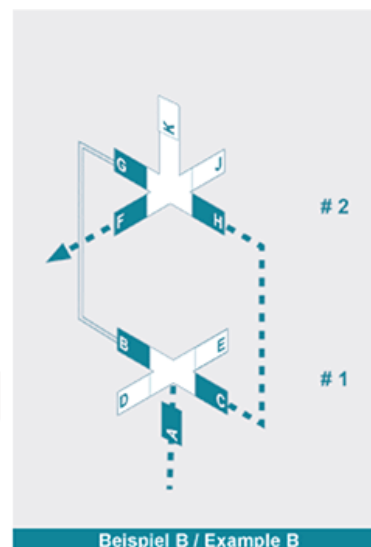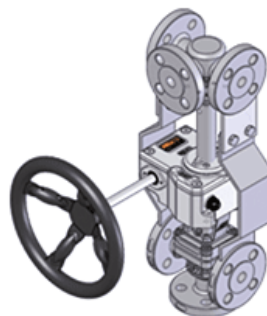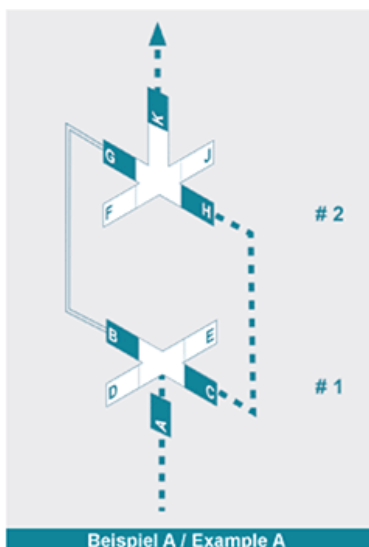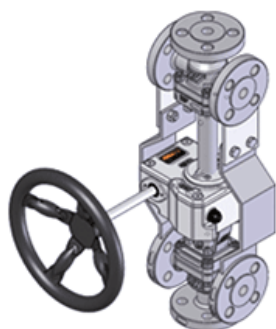


## Dimensionsn


Type UK with plug stem extension (T-wrench)

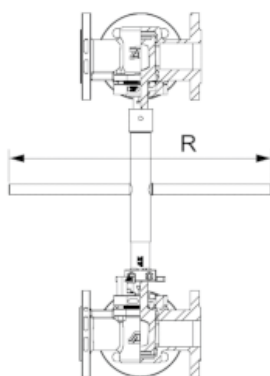

Typ UK with gearbox

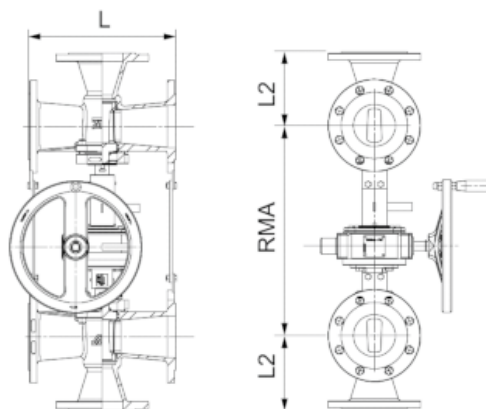

Type UK with pneumatic actuator

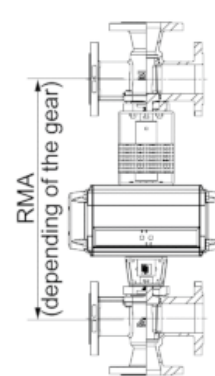


	DN	PN	L	L2		NPS	L	L2		Valve 1	Valve 2	R	RMA <sub>min</sub> [mm]	
			[mm]	[mm]			[mm]	[mm]				[mm]	T-wrench	gearbox
für Typ ISO-STANDARD, PN 10 - 40 gemäß DIN EN 1092-1 / 558	15	10 - 40	130	65	für Typ ISO-STANDARD, Class 150 / 300 gemäß ASME B16.10	1/2"	150	108	54	Umschaltkombinationen für Typ ISO-STANDARD	15	15	200	270
	20	10 - 40	150	75		3/4"	150	118	59		20	20	200	270
	25	10 - 40	160	80		1"	150	127	64		25	25	210	280
	32	10 - 40	180	90		1 1/2"	150	165	83		40	40	240	310
	40	10 - 40	200	100		2"	150	178	89		50	50	270	330
	50	10 - 40	230	115		3"	150	203	102		65	65	310	360
	65	10 - 40	290	155		4"	150	228	122		80	80	340	380
	80	10 - 40	310	155		5"	150	254	122		100	100	340	380
	100	10 - 40	350	175		6"	150	267	122		150	150	340	380
	125	10 - 40	325	162		8"	150	292	122		200	200	340	380
	150	10 - 40	350	200		10"	150	330	122		250	250	340	380
	200	10 - 40	400	220		12"	150	356	122					
	250	10 - 40	450	275			300	502	122					

\*) UK design with gearbox

other nominal sizes on request

 Specify desired dimension (RMA), minimum size = RMA<sub>min</sub>

## Actuation

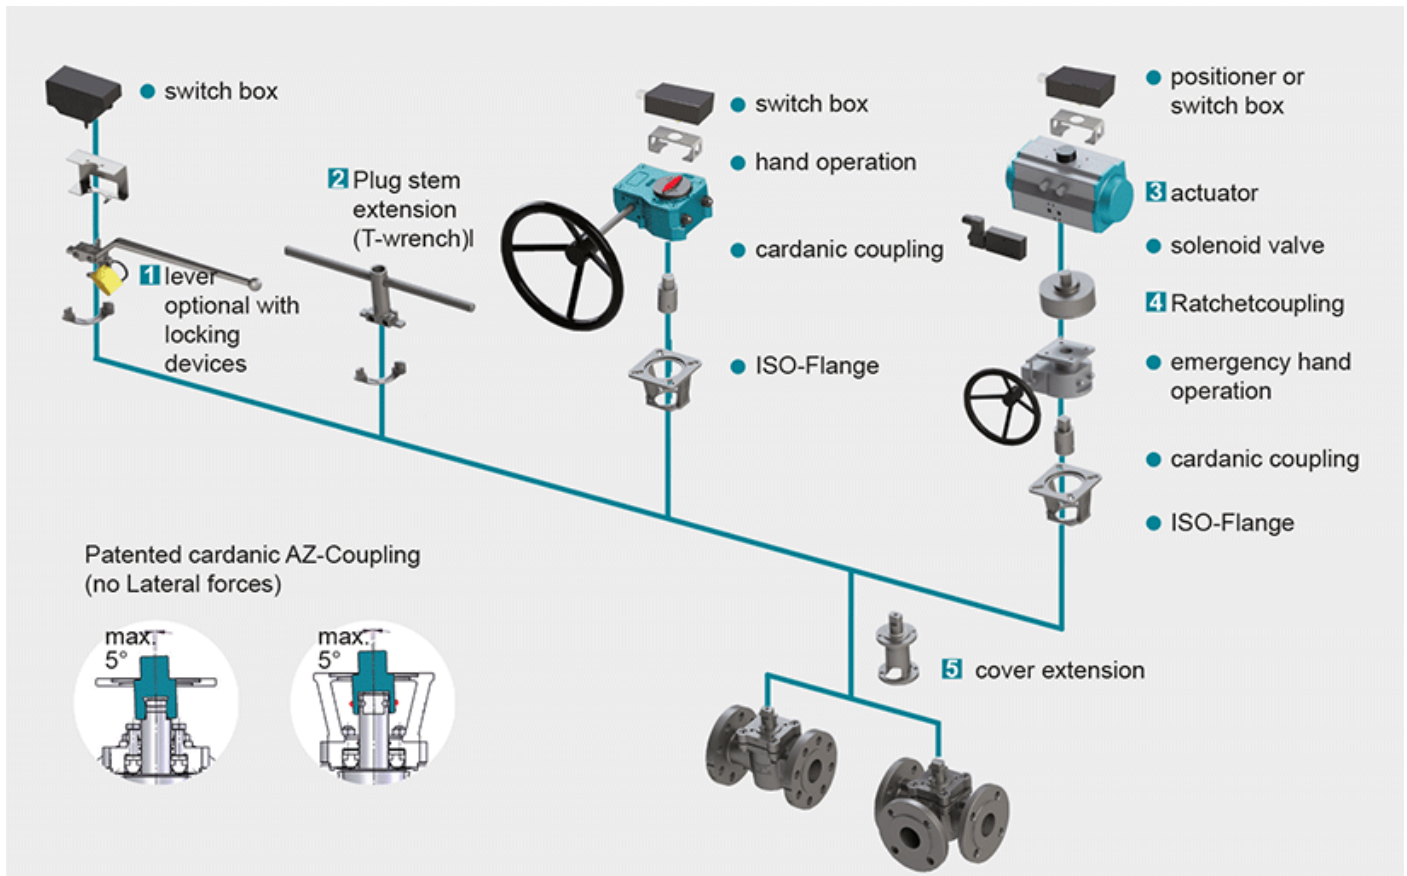

### 1 Locking Devices

Pilot valve combinations, pad lock eyelets, linear key conception, indexing plunger arrestor.

### [read more \[...\]](#) 2 Plug stem extension

Solid construction in stainless steel with T-wrench, Standard extension 100 mm or 150 mm, non standard lengths are available on request

### [read more \[...\]](#) 3 Actuators

Actuators for mounting-flange acc. to DIN ISO 5211

[read more \[...\]](#) NEW: Pneumatic actuator AIR GEAR for plug valves with high torque  $\geq 150.000$  Nm

### [read more \[...\]](#) 4 Ratched coupling

To usw on multiport valves with standard 90° actuator for bigger switchpositions than 90°

### [read more \[...\]](#) 5 Cover extension

Solid construction in stainless steel, Standard extension 100 mm or 150 mm high, non standard lengths are available on request . Hexagonal bolts on adjustment ring freely accessible. Note: Don't use with sealing FSN/FSN-SL and CASN/CASN-SL

[read more \[...\]](#)