

# DELTA-SG

## Ball check valve with FEP/PFA lining, with or without sightglass

DIN-EN: DN 15 - 250 / PN 10 - 40

ASME: NPS 1" - 4" / class 150



## Design Features

### Design Characteristics

- temperature range up to 150°C
- Borosilikat sightglass for visual function control (Type DELTA SG)
- with heating jacket on request
- with FEP or PFA lining (3 mm min).

### Installations instruction:

Ball riser must point upwards when valve

is horizontally installed and it must point upwards in a slanting position when valve is vertically installed.

## Materials

### Standard

- Ductile cast iron ENJS 1049, ASTM Gr 60-40-18 / A395

### Special materials

- Carbon Steel 1.0619 / ASTM A216 WCB
- Stainless steel 1.4308 / ASTM A351 CF8M
- Unalloyed stainless steel casting (low Temp.) 1.1138 / LCC/LCB / A352

### Sightglass

- Borosilikat

### Ball

- PTFE

### Lining materials


- Body: PFA, PFA-conductive, FEP

## Dimensions

	DN	PN	L	H
DIN 3202/EN 558-1	15	10-40	130	100
	20	10-40	150	100
	25	10-40	160	10
	32	10-40	180	*
	40	10-40	200	120
	50	10-40	230	160
	65	10-40	290	*
	80	10-40	310	185
	100	10/16 25/40	350	220
	150	10/16 25/40	350	380
	200	*	*	*
	250	*	*	*
ASME B 16.5	NPS	class	L	H
	1"	150	127	100
	1½"	150	*	*
	2"	150	178	150
	3"	150	203	200
	4"	150	229	230

\* on request  
Higher pressure load on request

DIN 3202/EN 558-1	DN	PN	L	H
	15	10-40	130	100
	20	10-40	150	100
	25	10-40	160	10
	32	10-40	180	*
	40	10-40	200	120
	50	10-40	230	160
	65	10-40	290	*
	80	10-40	310	185
	100	10/16 25/40	350	220
ASME B 16.5	NPS	class	L	H
	1"	150	127	100
	1½"	150	*	*
	2"	150	178	150
	3"	150	203	200
	4"	150	229	230

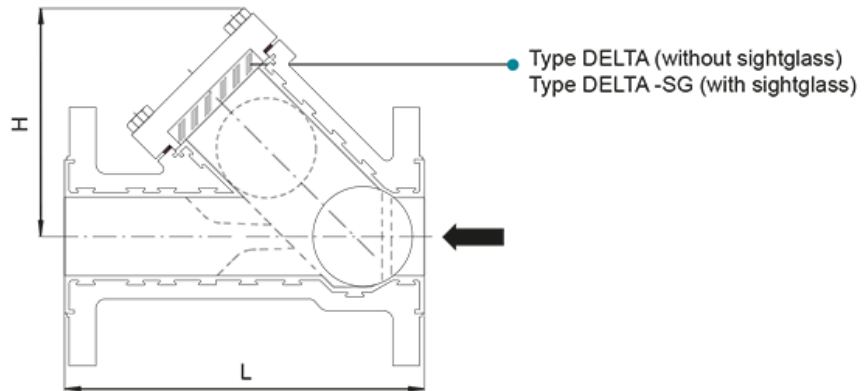

\* on request  
Higher pressure load on request