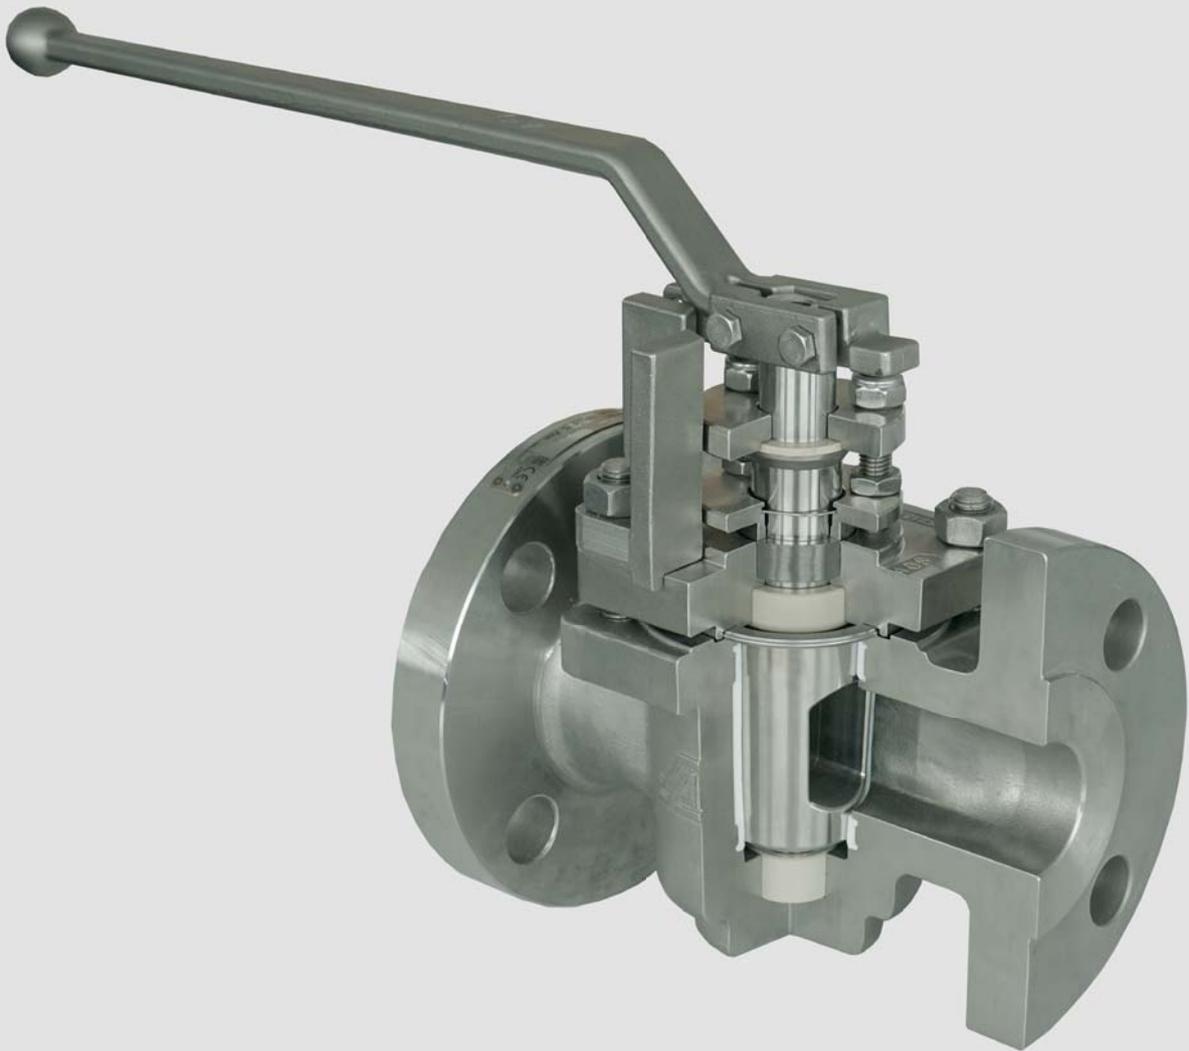




*engineered.
fast.
dynamic.*

Type HDS / HDS-GL

High-pressure plug valves



Product leaflet

Type HDS / HDS-GL

High-Pressure plug valves



Type HDS-GL

trunnion mounted design
with PEEK bearing

- High-pressure design
- from DN50 / PN160 with trunnion mounted plug

DN 15 - 600 / PN 63 - 160
NPS ½ - 24 / Class 600 - 900

Range of application:
-76 < T < 446°F / 608°F
vacuum-capable

Design characteristics

- easy accessible adjustment of the plug and safety stem packing
- low fugitive emission in line with TA LUFT, ISO 15848 & API 641 requirements
- Fire-Safe design acc. to API 607 / ISO 10497
- mounting-flange for actuators

Options

- higher pressure rating
- heating jacket
- flushing device
- FDA compliant
- painting
- oil and grease-free assembling



PT diagram, plug types, sealing systems, material selection: see catalog part ENGINEERING

Type overview

Type HDS / HDS-EXTRA

- sealing system FSN / CASN
- without PEEK bearing

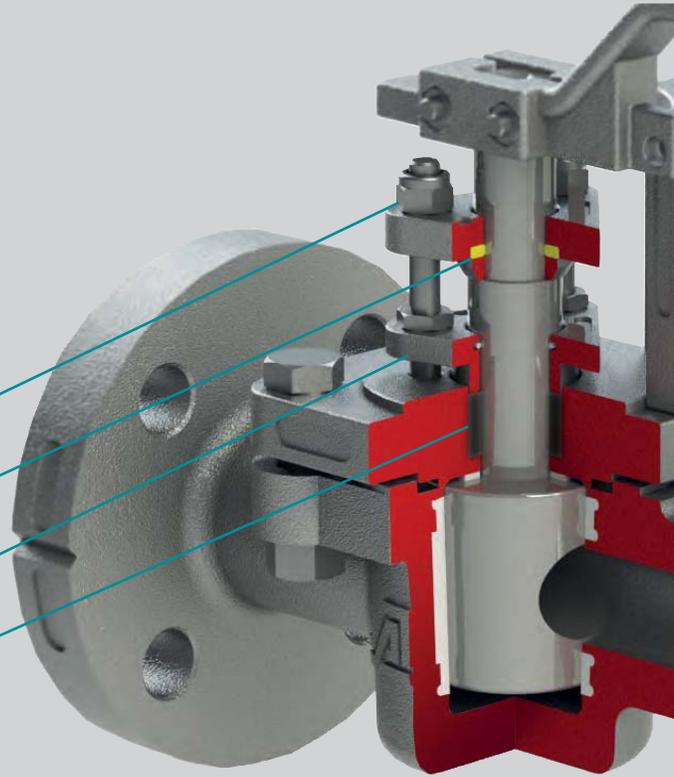
Type HDS

- DN 15 - 100 / PN 63 - 100
- NPS ½ - 4 / Class 600

Type HDS-EXTRA

- DN 15 - 150, PN 63 - 100

- plug adjustment
- thrust collar / PEEK bearing
- stuffing box adjustment
- stem packing




Type HDS-GL

- Sealing system FSN / CASN
- PEEK bearing \geq DN 50 / NPS 2


Type HDS-GL

- DN 100S - 500 / PN 63 - 100
NPS 4S - 24 / Class 600
- DN 15 - 150 / PN 160
NPS ½ - 4 / Class 900

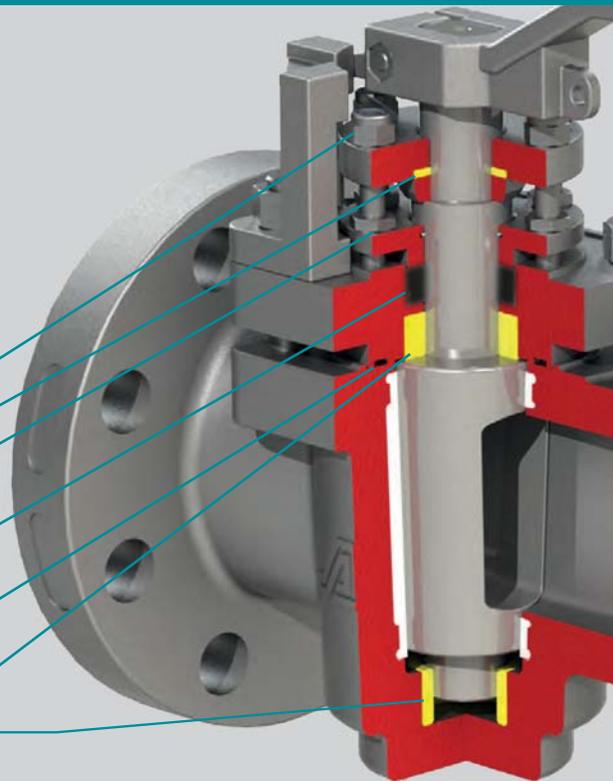- plug adjustment
- thrust collar / PEEK bearing
- stuffing box adjustment
- stem packing
- spiral sealing (graphite)
- trunnion mounted plug




Flange dimensions acc. to DIN EN / ASME

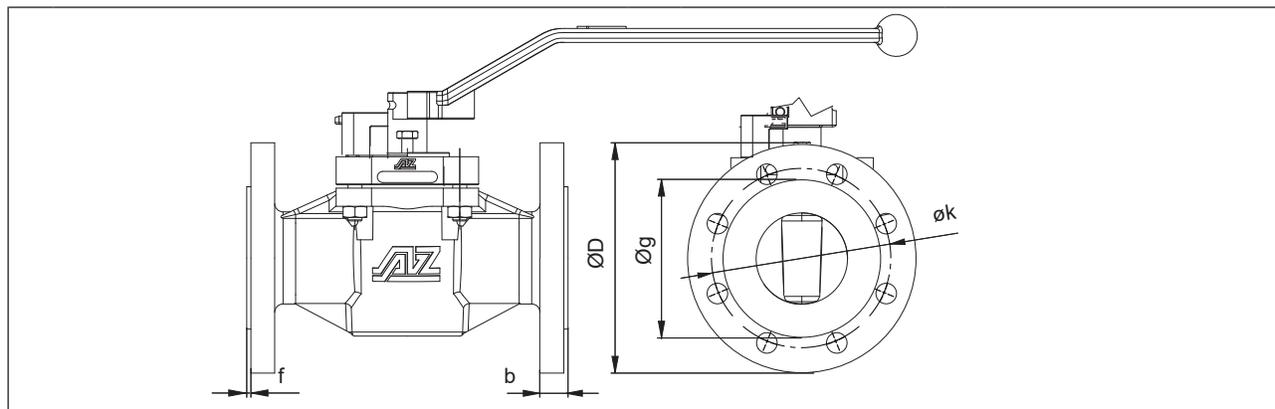

ASME B16.5	NPS Class		flange bore						
	øD	øk	no.	ø	øg	b	f		
	[mm] [Inch]	[mm] [Inch]		[mm] [Inch]	[mm] [Inch]	[mm] [Inch]	[mm] [Inch]		
ASME B16.5	½	600	95 4.60	66,7 2.63	4	15,7 5/8	34,9 1.37	21,3 0.84	7
		900	120 4.72	82,6 3.25	4	19,1 3/4	34,9 1.37	29,5 1.16	0.276
	1	600	125 4.92	88,9 3.50	4	19,1 3/4	50,8 2.00	24,5 0.97	7
		900	150 5.91	101,6 4.00	4	25,4 1	50,8 2.00	35,6 1.40	0.276
	1½	600	155 6.10	114,3 4.50	4	22,4 7/8	73 2.87	29,3 1.15	7
		900	180 7.09	123,8 4.87	4	28,4 1 1/8	73 2.87	38,8 1.53	0.276
	2	600	165 6.50	127 5.00	8	19,1 3/4	92,1 3.63	32,4 1.28	7
		900	215 8.46	165,1 6.50	8	25,4 1	92,1 3.63	45,1 1.78	0.276
	3	600	210 8.27	168,3 6.63	8	22,4 7/8	127 5.00	38,8 1.50	7
		900	240 9.45	190,5 7.50	8	25,4 1	127 5.00	45,1 1.78	0.276
	4	600	275 10.83	215,9 8.50	8	25,4 1	157,2 6.19	45,1 1.78	7
		900	290 11.42	235,0 9.25	8	31,7 1 1/4	157,2 6.19	51,5 2.03	0.276
	4S	600	275 10.83	215,9 8.50	4	25,4 1	157,2 6.19	45,1 1.78	7 0.276
		5	600	330 13.00	266,7 10.50	8	28,4 1 1/8	185,7 7.31	51,5 2.03
	6	600	355 14.00	292,1 11.50	12	28,4 1 1/8	215,9 8.50	54,7 2.15	7 0.276
		8	600	420 16.54	349,2 13.75	12	31,8 1 1/4	260,0 10.24	62,6 2.46
	10	600	510 20.08	431,8 17.00	16	35,1 1 3/8	323,8 12.75	70,5 2.78	7 0.276
		12	600	560 22.05	489,0 19.25	20	35,1 1 3/8	381,0 15.00	73,7 2.90
	14	600	605 23.82	527,0 20.75	20	38,1 1 1/2	412,8 16.25	76,9 3.03	7 0.276
		16	600	685 27.00	603,2 23.75	20	41,1 1 5/8	469,9 18.50	83,2 3.28
	18	600	745 29.33	654,0 25.74	20	44,5 1 3/4	533,4 21.00	89,6 3.53	7 0.276
		20	600	815 32.09	723,9 28.50	24	44,5 1 3/4	584,2 23.00	95,9 3.78
	24	600	950 37.40	838,2 33.00	24	50,8 2	692,2 27.25	108,6 4.28	7 0.276

Type HDS

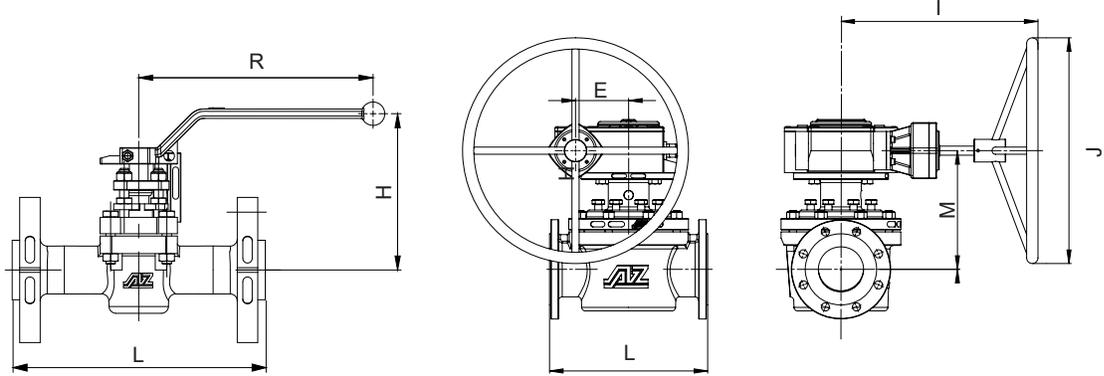Class 600, Fire-Safe sealing FSN




ASME B 16.10	NPS	Class	L	R	H	SW	torque*	weight	K_{vs}	C_v
			[mm]	[mm]	[mm]	[mm]	[Nm]	[kg]	$[m^3/h]$	[US.gal/min]
			[Inch]	[Inch]	[Inch]	[Inch]	[ft lb]	[lb]		
	½E	600	165	200	125	11	45	4,2	13	16
			6.50	7.87	4.92	0.433	33	9.2		
	¾	600	216	200	135	11	45	5,5	22	25
			6.50	7.87	5.31	0.433	33	12		
	1	600	216	200	135	11	45	10,0	26	31
			8.50	7.87	5.31	0.433	33	22		
	1½	600	241	320	135	14	100	15,5	79	92
			9.50	12.60	5.31	0.551	74	34		
2	600	292	420	195	19	180	24,6	139	161	
		11.50	16.54	7.68	0.748	133	54			
3	600	356	600	210	22	280	46,8	228	264	
		14.00	23.62	8.27	0.866	207	103			
4	600	432	600	210	22	380	71,0	198	229	
		17.00	23.62	8.27	0.866	280	156			

*) manufacturer recommended sizing torque (incl. 100% safety)

Type HDS-GL

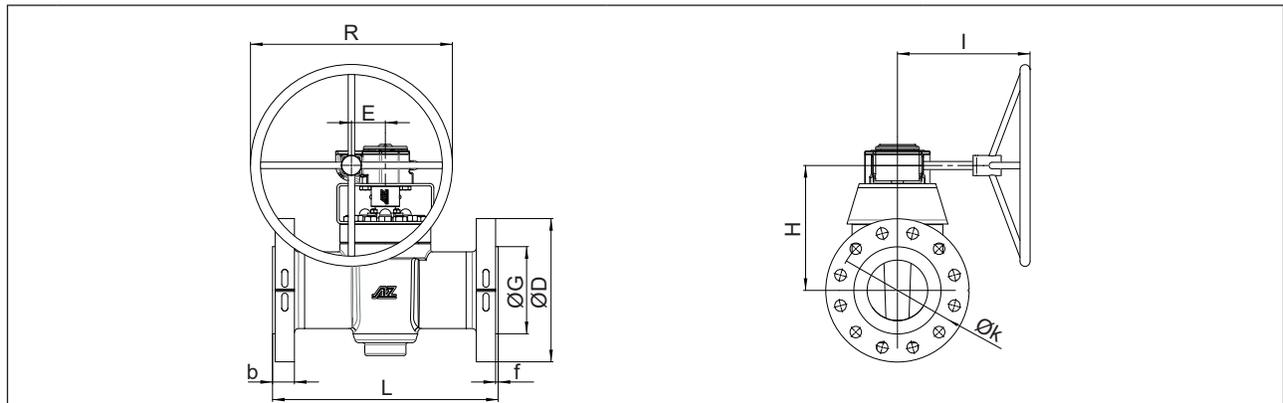Class 600, Fire-Safe sealing FSN




ASME B 16.10	NPS	Class	gearbox (Pro-Gear)					Type	torque*	weight	K _{Vs}	C _v
			L	E	R	H	I					
			[mm] [Inch]	[mm] [Inch]	[mm] [Inch]	[mm] [Inch]	[mm] [Inch]					
4S	600	600	462	69	300	270	275	Q800-S	600	**	**	**
			18.19	2.72	11.81	10.63	10.83	443				
5	600	600	508	84	400	297	290	Q1500-S	1170	**	**	**
			20.00	3.31	15.75	11.69	11.42	10,355				
6	600	600	559	84	400	297	290	Q1500-S	1170	**	775	896
			22.00	3.31	15.75	11.69	11.42	863				
8	600	600	660	96,5	600	340	350	Q3000-S	1560	**	1978	2286
			26.00	3.80	23.62	13.39	13.78	1,151				
10	600	600	787	137,5	600	395	465	Q6500-S	1950	**	2382	2754
			31.00	5.41	23.62	15.55	18.31	1,438				
12	600	600	838	137,5	600	415	465	Q6500-S	3380	**	1925	2225
			33.00	5.41	23.62	16.34	18.31	2,493				
14	600	600	889	137,5	600	485	465	Q6500-S	7150	**	2394	2768
			35.00	5.41	23.62	19.09	18.31	5,274				
16	600	600	991	137,5	600	500	465	Q6500-S	7150	**	4818	5339
			39.00	5.41	23.62	19.69	18.31	5,274				
18	600	600	1092	180	600	520	520	Q12000-S	8320	**	12427	14367
			42.95	7.09	23.62	20.47	20.46	6,137				
20	600	600	1194	180	600	545	520	Q12000-S	9750	**	11841	13689
			47.00	7.09	23.62	21.46	20.46	7,191				

*) manufacturer recommended sizing torque (incl. 100% safety)

**) on request

Type HDS-GL

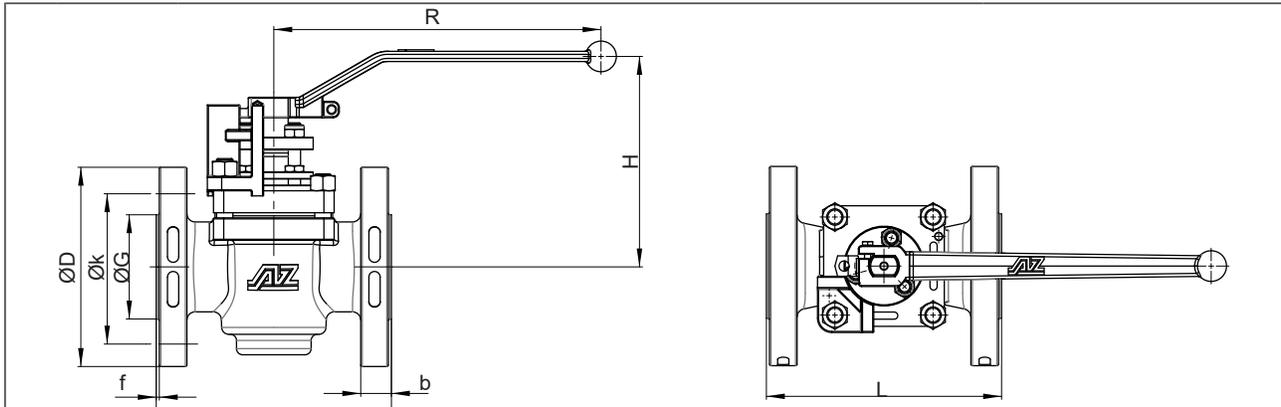Class 900, Fire-Safe sealing FSN



ASME B 16.10	NPS	Class	L	R	H	SW	torque*	weight	K_{vs}	C_v
			[mm] [Inch]	[mm] [Inch]	[mm] [Inch]	[mm] [Inch]	[Nm] [ft lb]	[kg] [lb]	[m ³ /h]	[US.gal/min]
	½E	900	216 8.50	200 7.87	125 4.92	11 0.433	55 41	4,2 9.3	13	16
	¾	900	216 8.50	200 7.87	125 4.92	11 0.433	55 41	6,6 15	22	25
	1	900	254 10.00	200 7.87	135 5.31	11 0.433	55 41	10 22	26	31
	1½	900	305 12.00	320 15.60	135 5.31	14 0.551	120 89	16 34	79	92
	2	900	368 14.50	420 16.54	195 7.68	17 0.669	200 148	26 56	139	161
	3	900	381 15.00	600 23.62	210 8.27	22 0.866	300 221	49 108	228	264
	4	900	457 18.00	600 23.62	210 8.27	22 0.866	430 317	75 164	198	229
	6	900	610 24.00	*	*	36 1.417	2160 1593	211 465	875	1011

Counter-bearing from DN50 / NPS2⁴

*) manufacturer recommended sizing torque (incl. 100% safety)

**) on request

Other sizes on request

Engineering

Design

- free of cavities, adjustability, modular concept options

Sealing systems

- STD, FS, CA, FSN (-SL), CASN (-SL), SAFE-LINED, special

Fugitive emission

- Low-Emission Valves acc. to TA-Luft, ISO 15848 & API 641

Materials

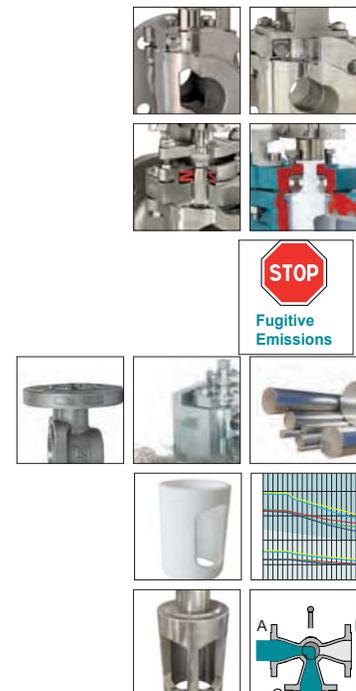
- casting materials, forged and bar material, lining materials

PT-diagrams

- pressure, temperature, materials

Plug types

- for two-way and multi-way valves



AZ-plug valve: the design principle

Key advantages

- free of cavities
- no contamination of process media
- adjustability of the plug and sealings
- maintenance-free due to self-lubricating and chemical-resistant PTFE-sleeve
- low emission design
- constant torque (Δp independent !)
- vacuum-capable

Tapered plug

- plug pressed into the PTFE-sleeve
- polished surface



Body

- tapered body interior
- integrated supporting ribs avoid rotation and coldflow of the sleeve
- large sealing surface

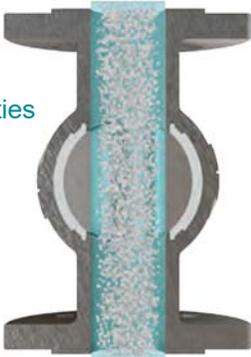
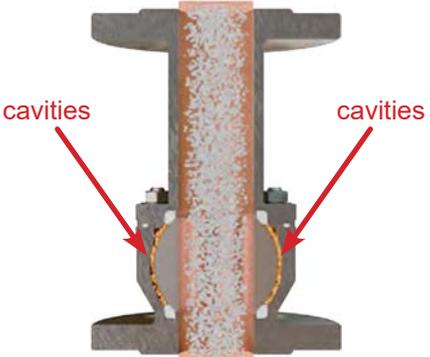
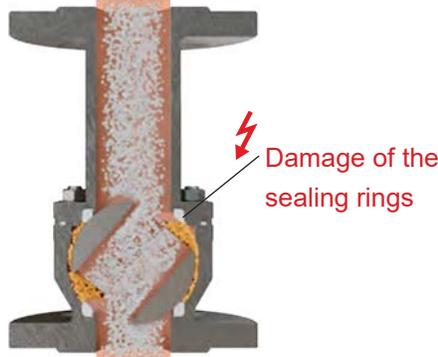
PTFE-sleeve

- mechanically locked into the valve body
- complete PTFE chambering
- robust, one-piece sleeve covers and protects the entire plug



Cavity-free – suitable for all media

Technical comparison

AZ-plug valve	Ball valve
<p>Soft seated plug valve with PTFE-sleeve</p>  <p>Main sealing components</p> <ul style="list-style-type: none"> • metallic plug • sleeve 	<p>Soft seated ball valve with PTFE sealing rings, floating ball</p>  <p>Main sealing components</p> <ul style="list-style-type: none"> • metallic ball • sealing rings
OPEN position	
<ul style="list-style-type: none"> • suitable for all media due to cavity-free design • sealing surfaces are completely protected  <p>free of cavities</p>	<ul style="list-style-type: none"> • critical for the following media due to design with cavities <ul style="list-style-type: none"> ○ corrosives: crevice corrosion ○ polymerizing: clogging ○ crystallizing: abrasion / clogging  <p>cavities</p> <p>cavities</p>
During operation	
<ul style="list-style-type: none"> • free of cavities, media cannot settle or be trapped • solids are pushed away • no contamination with old media 	<ul style="list-style-type: none"> • with cavities, media can settle or be trapped • solids cause abrasion of the sealing rings • contamination of process media  <p>Damage of the sealing rings</p>

Safe and reliable tightness for years

Adjustable



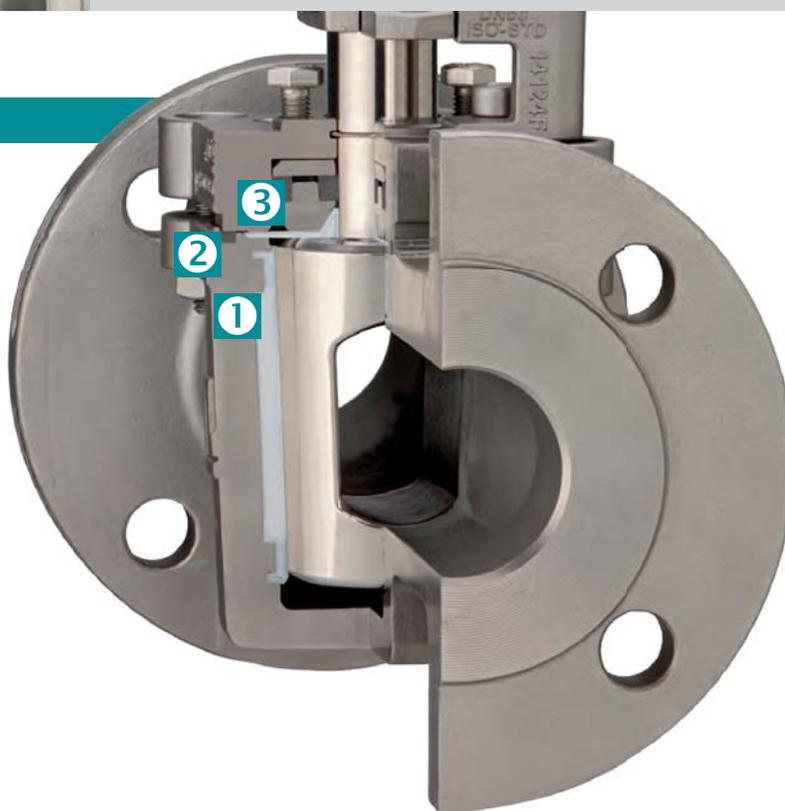
- tapered plug design allows retightening of the sealing on site - if needed
- adjusting bolt even accessible with mounted actuator / gearbox

Several sealing steps to atmosphere

- 1 Primary: sleeve
- 2 Secondary: diaphragm / cover seal
- 3 Tertiary: stem packing (optional)



Detailed information about all certified AZ cover & stem sealing systems see chapter
SEALING SYSTEMS



ISO cover



- bracket bolting
- cover bolting

- pressure containing cover bolts separated from bracket boltings
- cover and bracket acc. to ISO 5211 for efficient actuator / gearbox assembly

Reduced and full bore design

Execution


Reduced bore Type STANDARD

- compact valve (FF / weight)
- optimal torques for economic automation




Full round bore Type EXTRA

- maximum flow rate
- minimal pressure drop
- piggable (optional)




Type ISO-EXTRA

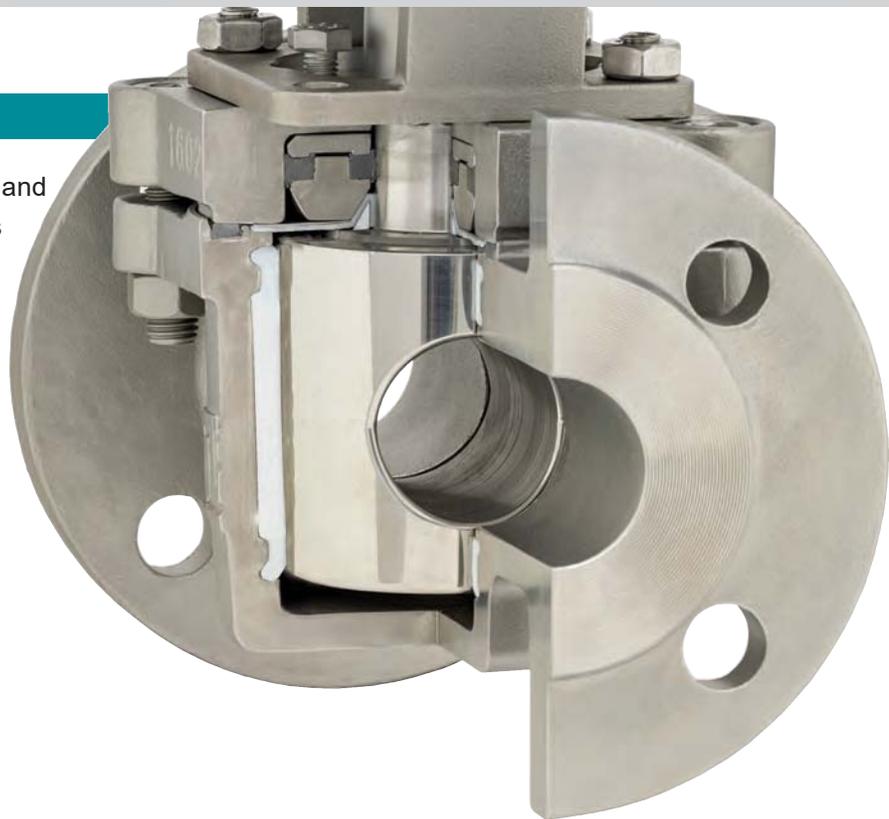- excellent for abrasive, slurry and solid-containing applications
- maximum flow rate compared to other valve types with the same nominal size



Maximum flow rate

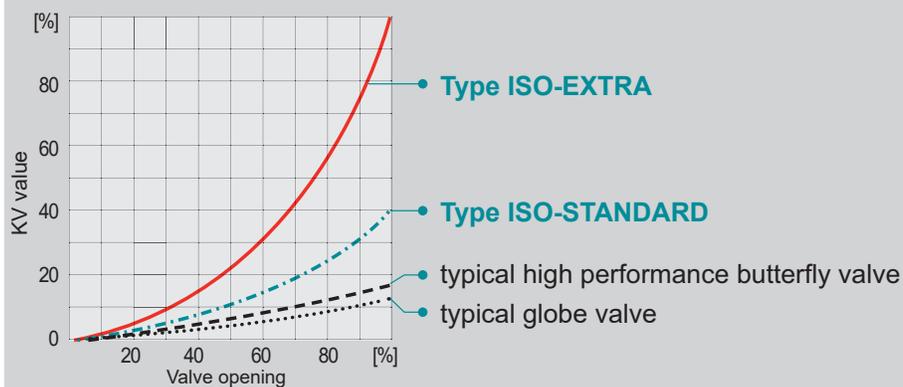


Options



Multi-port

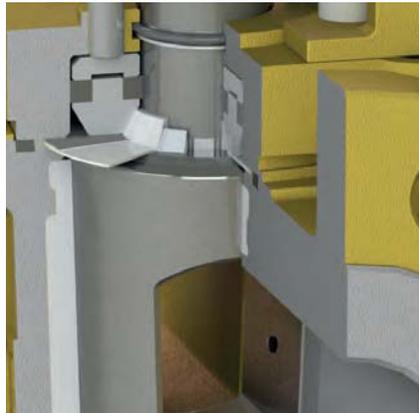- whole range of multi-port plugs for all configurations (up to 7-way)
- horizontal and vertical installation



Vented options

- plug bottom
- plug upstream / downstream automatic pressure balance in case of thermal media expansion



System requirements

- **FDA** = Food and Drug Administration certifications and compliant materials
- **GMP** = Good-Manufacturing-Practice
- **CIP** = Clean-in-Place
- Polished internal surfaces, surface finish <math><0.8 \text{ Ra } \mu\text{m}</math> (<math><32 \text{ Ra } \mu\text{in}</math>)
- oil and grease free
- water-free



All connections possible

- flanges acc. to ASME, JIS etc.
- welded ends
- screwed and threaded ends
- combinations of connections
- oversize flanges
- compression fittings and ferrule ring couplings
- special connections



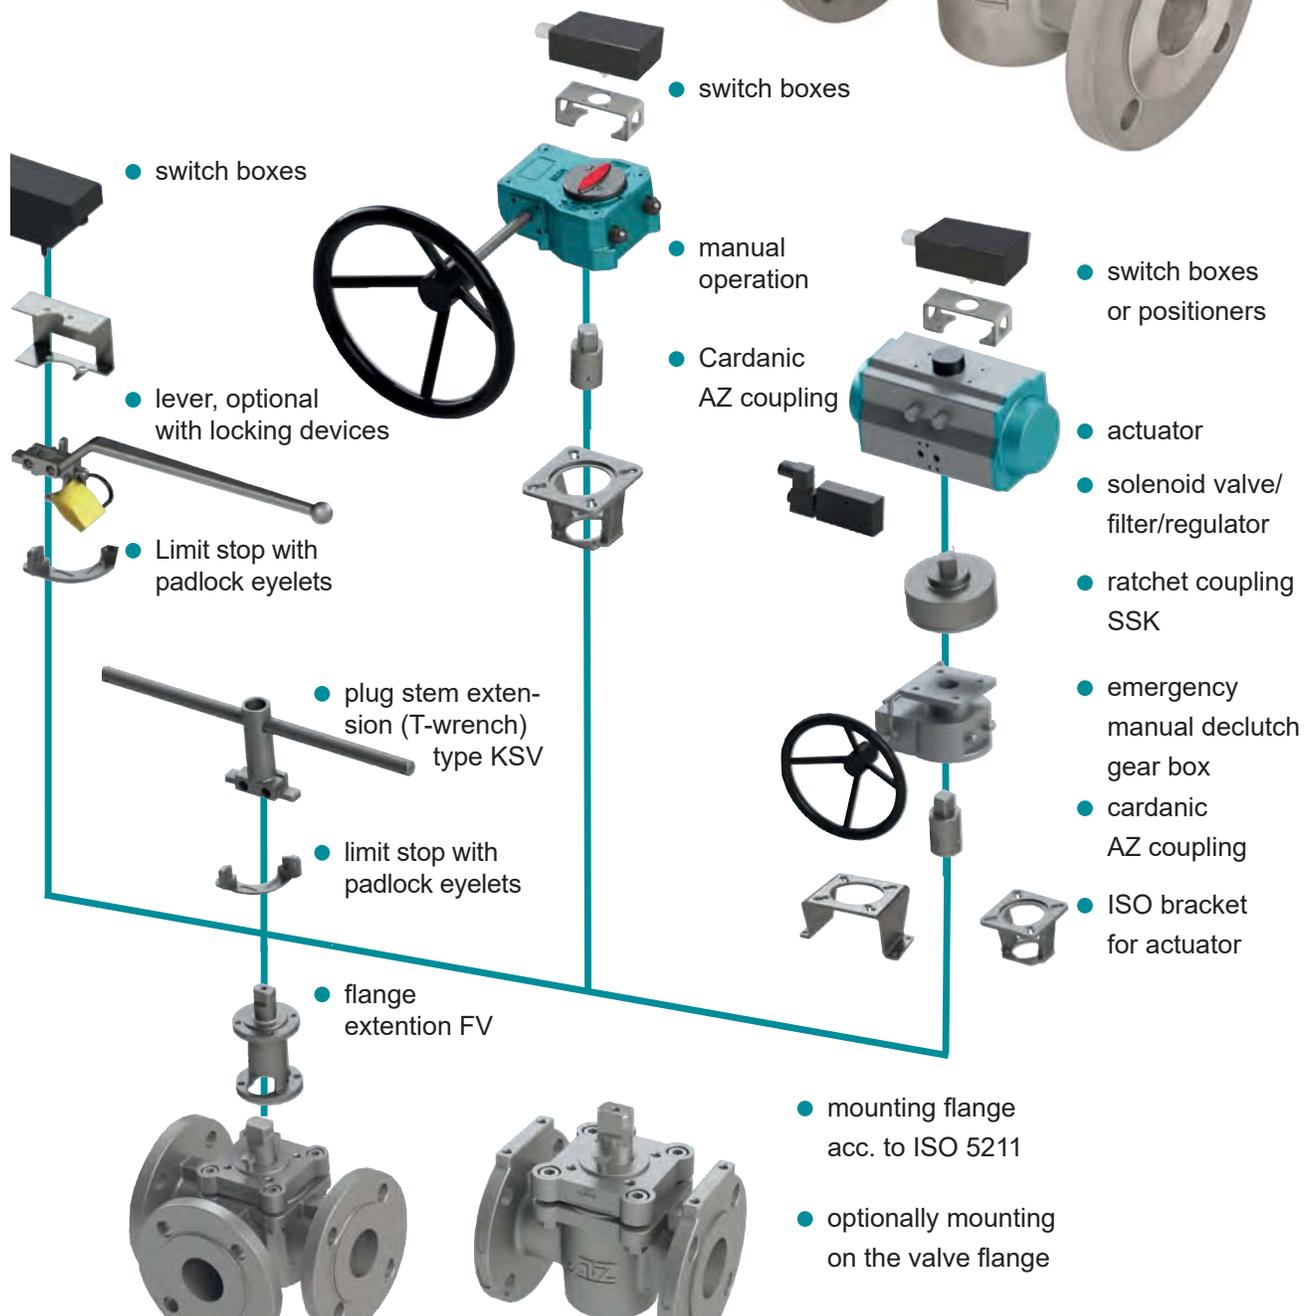
High and low temperature

- extended bonnet with sealing at the top
- stem extension for insulated valves




Modular operation concept

Bracket according to ISO 5211

- standard installation of gearbox and actuator
- safe due to independent mounting of cover and bracket
- covering bonnet bolts to prevent opening of valve in service
- precise centering of the bracket to the plug stem due to adjusting ring
- easy inline plug adjustment during the process, screws are always accessible



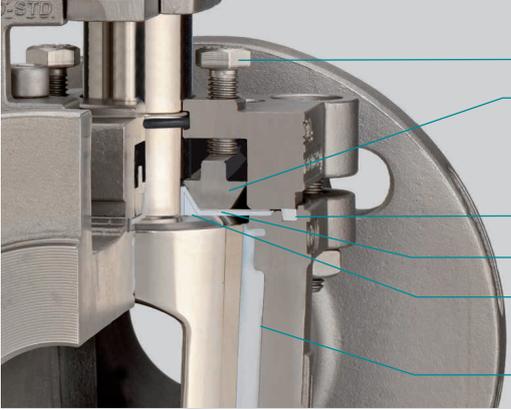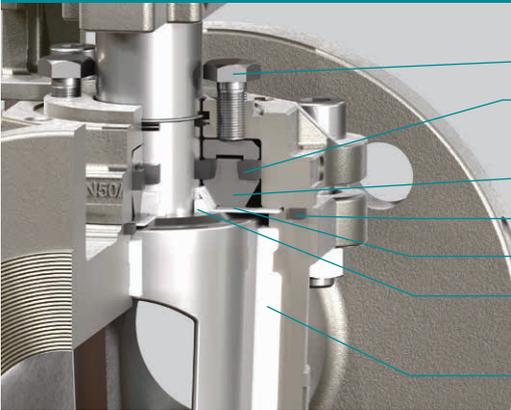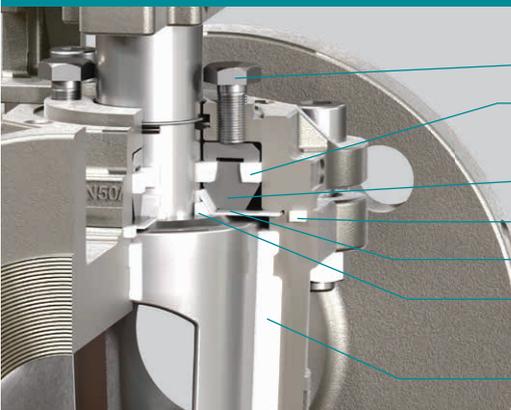Cover and stem sealing systems suitable for general applications


	<p>Type STANDARD</p> <ul style="list-style-type: none"> ● plug adjustment ● thrust collar ● cover sealing (PTFE) ● stainless steel diaphragm ● Secondary sealing: V-diaphragm (PTFE), delta thrust collar (PTFE) ● Primary sealing: sleeve*
	<p>Type FS2 Fire-Safe-sealing (API 607)</p> <ul style="list-style-type: none"> ● plug & packing adjustment ● Tertiary sealing: Packing to atmosphere (graphite) ● thrust collar ● cover sealing (graphite) ● stainless steel diaphragm ● Secondary sealing: V-diaphragm (PTFE) and delta thrust collar (PTFE) ● Primary sealing: sleeve*
	<p>Type CA2 Chemistry sealing</p> <ul style="list-style-type: none"> ● plug & packing adjustment ● Tertiary sealing: Packing to atmosphere (PTFE) ● thrust collar ● cover sealing (PTFE) ● stainless steel diaphragm ● Secondary sealing: V-diaphragm, delta thrust collar (PTFE) ● Primary sealing: sleeve*

*) The sleeve material has a decisive influence on the maximum operating temperature
Material selection acc. to PT-diagram

More safety for severe applications

*engineered.
fast.
dynamic.*

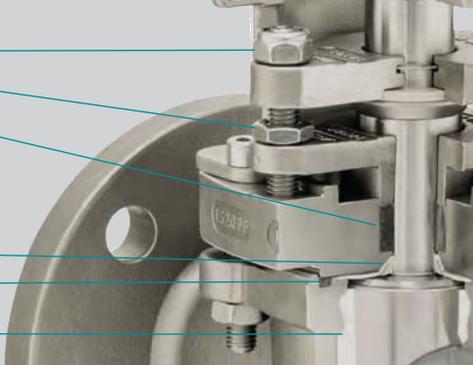Type FSN Fire-Safe-sealing (API 607)



- plug adjustment ●
- triple safety stem packing adjustment ●
- Tertiary sealing:** triple safety stem packing (graphite) ●
- Secondary sealing:**
 - V-diaphragm (PTFE) and delta thrust collar(PTFE) ●
 - cover sealing (graphite) ●
- Primary sealing:** sleeve* ●

Type FSN-EF Fire-Safe-sealing (API 607)

Emission Free

NEW!



- plug adjustment ●
- triple safety stem packing adjustment ●
- Quaternary sealing:** three o-rings at the stem ●
- Tertiary sealing:** triple safety stem packing ●
- Secondary sealing:**
 - V-diaphragm (PTFE) and delta thrust collar (PTFE) ●
 - cover sealing (graphite) ●
- Primary sealing:** sleeve* ●

Type FSN-SL Fire-Safe-sealing (API 607)

live-loaded



- plug adjustment ●
- o-rings protect the springs against corrosion ●
- triple safety stem packing adjustment ●
- disk springs (optionally made of Inconel) ●
- Tertiary sealing:** triple safety stem packing (graphite) ●
- Secondary sealing:**
 - V-diaphragm (PTFE) and delta thrust collar (PTFE) ●
 - cover sealing (graphite) ●
- Primary sealing:** sleeve* ●

*) The sleeve material has a decisive influence on the maximum operating temperature
Material selection acc. to PT-diagram

Material for **type CASN** and **CASN-SL** chemistry safety sealing: packing and cover sealing in PTFE

Special sealing systems

Chevron packing

- increases the contact pressure (when pressure builds up on the safety stem packing towards stem)
- for toxic and fugitive media
- high wear resistance



Type CL Chlorine / gas applications

- approved for chlorine applications
- ideal for media with changing state of aggregate (e.g. liquid to gas, vice versa)
- vacuum capable



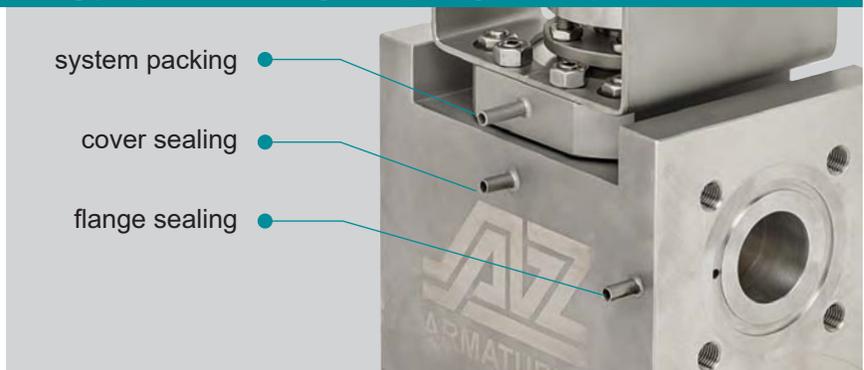
Detection / Grease ports for monitoring purpose of lethal gases (phosgene, etc.)

- detection ports for early recognition of potential leakages
- sniffing at sealing surfaces to atmosphere

system packing

cover sealing


flange sealing



Type CA

Chemistry sealing

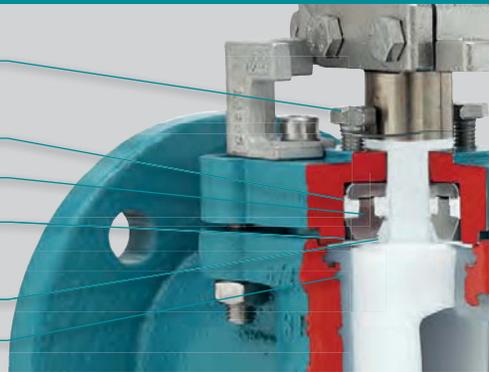- plug & packing adjustment ●
- Tertiary sealing:** Packing to atmosphere (PTFE) ●
- thrust collar ●
- stainless steel diaphragm ●
- Secondary sealing:**
V-diaphragm & delta thrust collar (PTFE) ●
- Primary sealing:** lined body ●




Type SAFE-LINED

Chemistry sealing

lined cover

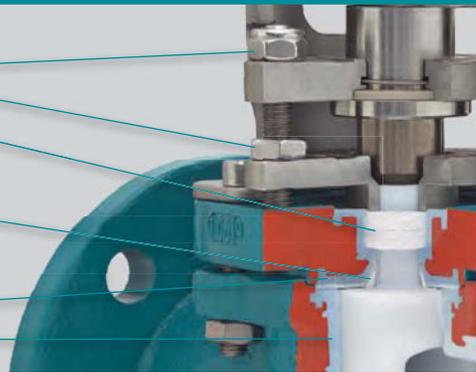- plug adjustment ●
- triple safety stem packing adjustment ●
- Tertiary sealing:** ●
- triple safety stem packing (PTFE) to atmosphere ●
- Secondary sealing:** ●
- V-diaphragm (PTFE), delta thrust collar (PTFE) ●
- lined cover ●
- Primary sealing:** lined body* ●



Type SAFE-LINED-SL

Chemistry sealing

live-loaded

- plug adjustment ●
- o-rings protect the springs against corrosion ●
- triple safety stem packing adjustment ●
- disk springs (optionally made of Inconel) ●
- Tertiary sealing:** triple safety stem packing (PTFE) ●
- Secondary sealing:** ●
- V-diaphragm (PTFE), delta thrust collar (PTFE) ●
- lined cover ●
- Primary sealing:** lined body* ●



*) Lining and plug material have a decisive influence on the maximum operating temperature
Material selection according to PT-diagram.

WORLD'S FIRST EMISSION FREE
plug valve certified acc. to **ISO 15848-1 / AH**
Type **FSN-EF**

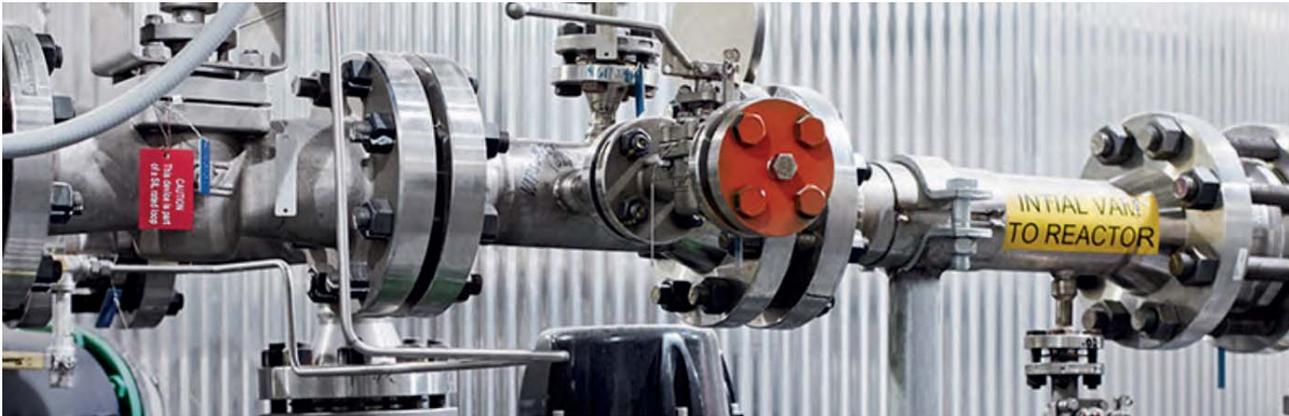
NEW!



Fugitive
Emissions



Low-Emission according ISO 15848, TA-Luft & API 641



For all important information about ISO 15848, TA-Luft & API 641, as well as the current certificates, please refer to the "AZ Fugitive Emission" brochure



Latest information about ISO 15848 / API 641 / TA Luft see AZ Fugitive Emissions leaflet



Casting materials



		Casting Material					
Material Group	Common Name	EN / DIN	Short name	Material-No.	ASTM	Grade	UNS
Carbon Steel / Ductile Iron							
Ductile Iron	SG Iron	EN 1563	EN-GJS-400-18-LT	5.3103	A395	-	F32800
Carbon Steel	CS	EN 10213	GP240GH	1.0619	A216	WCB	J03002
Low Temp. Carbon Steel	LTCS	EN 10213	G17Mn5	1.1131	A352	LCB	J03003
Low Temp. Carbon Steel	LTCS	EN 10213	G21Mn5	1.1138	A352	LCC	J02505
Stainless Steel							
Stainless Steel	Duplex 2205	EN 10213	GX2CrNiMoN22-5-3(4A)	1.4470	A995	4A-CD3MN	J92205
Stainless Steel	Duplex 1B	EN 10213	GX3NiCrMoCuN26-6-3-3	1.4517	A995	1B-CD4MCuN	J93372
Austenitic	SS	EN 10213	GX5CrNi19-10	1.4308	A351	CF8	J92600
Austenitic	SS	EN 10213	GX2CrNi19-11	1.4309	A351L	CF3	J92700
Austenitic	SS	EN 10213	GX5CrNiMo19-11-2	1.4408	A351	CF8M	J92900
Austenitic	SS	EN 10213	GX2CrNiMo19-11-2	1.4409	A351	CF3M	J92800
Super Austenitic	Alloy 20	EN 10213	NiC420CuMo	1.4500	A351	CN7M	N08007
Super Austenitic	Alloy 20 mod.	EN 10213	GX2NiCrMoCuN25-20	1.4536	A743	CN7MS	J94650
Super Austenitic	AL6XN	-	-	-	A351	CN3MN	J94651
Superduplex	Superduplex 5A	EN 10213	25Cr-7Ni-Mo-N	1.4469	A995	CE3MN	J93404
Nickel Alloy							
	Monel/Alloy400	DIN 17730	G-NiCu30 Nb	2.4365	A494	M35-1	N24135
	Hastelloy C mod.	-	-	-	A494	CW6M	N30107
	Hastelloy C	-	-	2.4537	A494	CW12MW	N30002
	Hastelloy C-276	-	-	2.4883	-	-	-
	Hastelloy B-3	-	-	-	-	-	-
	Inconel 600	-	-	-	A494	CY40	N06040
	Inconel 625	-	-	-	A494	CW6MC	N26625
	Inconel 825	-	-	-	A494	CU5MCuC	N08826
	Nickel	DIN 17730	G-Ni 95	2.4170	A494	CZ100	N02100
Other Material Groups							
Tantalum	Tantalum	-	-	-	-	-	-
Titanium	Ti 2	DIN 17865	G-Ti 2	3.7031	B367	C-2	R52550
Zirconium	Zirconium 702	-	-	-	B752	702C	-
Zirconium	Zirconium 705	-	-	-	-	705C	-

All rights reserved, all indications without engagement, subject to modifications.

The use of these equivalents has to be evaluated on a case-by-case basis.

Other materials on request.

Similar forged and bar materials



Common Name	Mat.Nr.	Grade	Similar Forged Material						Bar Material	
			EN / DIN	Short Name	Mat.Nr.	ASTM	Grade	UNS	ASTM Short	
Carbon Steel / Ductile Iron										
SG Iron	5.3103	-	EN 1563	EN-GJS-400-18-LT	5.3103	A395-99	60-40-18	-	-	-
CS	1.0619	WCB	EN 10213	GP240GH	1.0619	A105	A105	-	-	-
LTCS	1.1131	LCB	-	-	-	A350	LF2-Class1	G10300	-	-
LTCS	1.1138	LCC	-	-	1.0566	A350	LF2-Class1	G10250	-	-
Stainless Steel										
Duplex 2205	1.4470	4A-CD3MN	EN 10028-7	X2CrNiMoN22-5-3	1.4462	A182	F51	S32205	A479	S31803
Duplex 1B	1.4517	1B-CD4MCuN	EN 10028-7	X2CrNiMoCuN25-5-3	1.4507	A182	F59	S32520	A479	S32550
SS	1.4308	CF8	EN 10028-7	X5CrNi18-10	1.4301	A182	F304	S30400	A276	304
SS	1.4309	CF3	EN 10028-7	X2CrNi19-11	1.4306	A182	F304L	S30403	A276	304L
SS	1.4408	CF8M	EN 10028-7	X5C4NiMo17-12-2	1.4401	A182	F316	S31600	A276	316
SS	1.4409	CF3M	EN 10028-7	X2CrNiMo 17-12	1.4404	A182	316L	S31603	A276	316L
Alloy 20	1.4500	CN7M	-	-	2.4660	B462	N08020	N08020	B473	N08020
Alloy 20 mod.	1.4536	CN7MS	-	-	-	-	-	-	-	-
AL6XN	-	CN3MN	EN 10028-7	X1NiCrMoCuN25-20-7	1.4529	A182	F62	N08367	B462	N08367
Superduplex 5A	1.4469	CE3MN	EN 10028-7	X2CrNiMoN25-7-4	1.4410	A182	F63	S32615	-	-
Nickel Alloy										
Monel/Alloy400	2.4365	M35-1	DN 17744	NiCu30Fe	2.4360	B165	Alloy 400	N04400	B164	N04400
Hastelloy C mod.	-	CW6M	-	-	-	A494	-	-	-	-
Hastelloy C	-	CW12MW	-	NiMo16CrW	-	A494	-	-	-	-
Hastelloy C-276	-	-	DIN 17744	NiMo16Cr15W	2.4819	B565	N10675	N10276	B574	N10276
Hastelloy B-3	-	-	DIN 17744	NiMo29Cr	2.4600	B565	N10675	N10675	B335	N10675
Inconel 600	-	CY40	DIN 17742	NiCr15Fe	2.4816	B565	N06600	N06600	B166	N06600
Inconel 625	-	CW6MC	DIN 17744	NiCr22Mo9Nb	2.4856	B565	N06625	N06625	B446	N06625
Inconel 825	-	CU5MCuC	DIN 17744	NiCr21Mo	2.4858	B564	N08825	N08825	B425	N08825
Nickel	2.4170	CZ100	-	-	-	-	-	-	B160	N02200
Other Material Groups										
Tantalum	-	-	-	-	-	B365	TaW2,5	R05252	-	-
Ti 2	3.7031	C-2	DIN 17864	Grade 2	3.7035	B381	F2	R50400	B348	Grade 2
Zirconium 702	-	702C	-	-	6.0702	B493	R60702	R60702	B550	R60702
Zirconium 705	-	705C	-	-	-	B493	R60705	R60705	B550	R60705

All rights reserved, all indications without engagement, subject to modifications.

The use of these equivalents has to be evaluated on a case-by-case basis.

Other materials on request.

Lining materials



Lining materials

The high density, extremely resistant lining is at least 3 mm thick. New granulate is used exclusively, no refurbished regenerates or similar materials.

Fluoropolymer lining materials

- Body: PFA, PFA conductive and FEP
- Plug: PTFE, PFA, PFA conductive and FEP

body lining	Combination of linings plug lining	T _{max}
PFA	PTFE ¹⁾ or special materials	210°C / 410°F
PFA	PFA	200°C / 392°F
PFA	FEP	150°C / 302°F
PFA conductive	PFA conductive	125°C / 257°F
FEP	FEP	150°C / 302°F
FEP	PFA	150°C / 302°F

- 1) Plugs with PTFE lining only for two-way valves up to DN 100.
Plugs for multi-way valves not with PTFE lining available.

IMPORTANT NOTE

For demanding conditions, such as process temperatures exceeding 150°C / 302°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of lining material, cover sealing type and special features.

Sleeve materials




Category	Sleeve Material	Characteristics	Typical applications	T _{MAX}
PTFE	PTFE, virgin	low friction, very good sealing characteristic	standard sleeve material for most applications	230°C / 446°F
RPTFE	PTFE-Glass	reinforced PTFE	additional stability for multiway valves with horizontal ports	230°C / 446°F
	PTFE-Graphite	reinforced PTFE	high temperature applications	250°C / 482°F
modified PTFE	TFM 1600* NXT 75* M 111*	chemically modified PTFE, reduced permeation, low friction	chemical applications where reduced permeability compared to PTFE is required	250°C / 482°F
Special Sleeves	PTFE-P* NFCE* NCS*	high performance sleeve materials	severe service highest temperatures, high pressure, abrasive applications	320°C / 608°F
PFA	PFA	reduced permeation	chemical applications where reduced permeability compared to PTFE is required	200°C / 392°F
UHMW-PE	UHMW-PE	Ultra High Molecular Weight Polyethylene	radiation resistant, abrasive application	80°C / 176°F

*) sleeve material selection depending on availability at AZ manufacturing site

IMPORTANT NOTE

for demanding conditions, such as process temperatures exceeding 200°C / 392°F:
Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of sleeve material, cover sealing type and special features. For other sleeve materials not listed above: please contact your AZ sales representative.

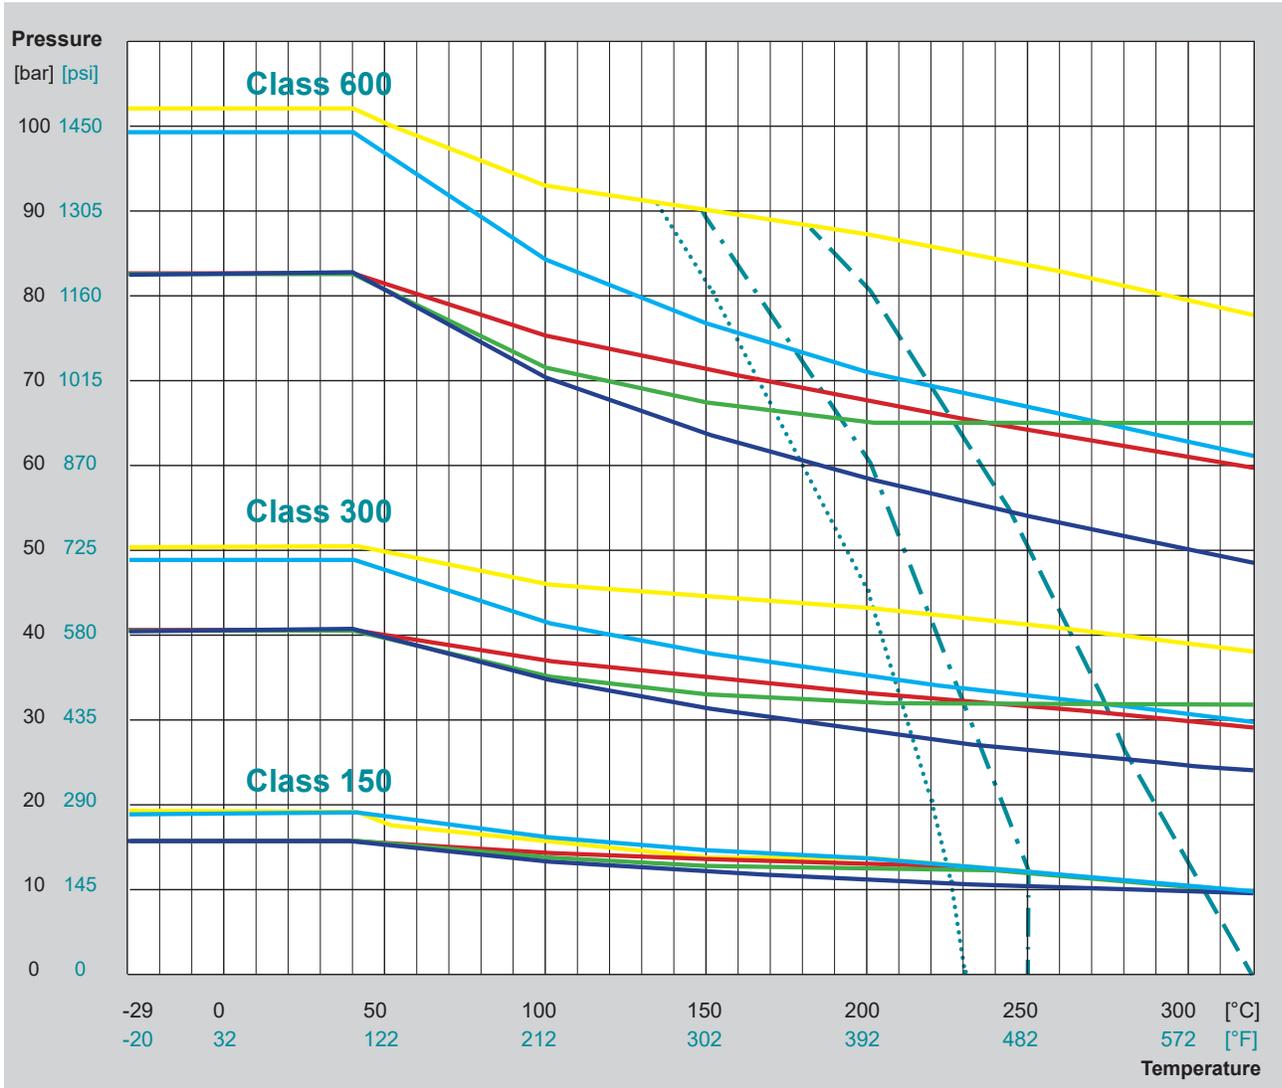PT Diagram - Class 150 - Class 600 for PTFE sleeved plug valves



Body material

- ASTM A216 - WCB
- ASTM A351 - CF8M
- ASTM A494 - CW12MW / Hastelloy
- ASTM A494 - M35.1 / Monel 400
- ASTM A351 - CN7M Alloy 20
- other body materials on request

Sleeve material

- ⋯ PTFE (virgin) / PTFE (glass) T_{max} 230°C / 446°F
- - - TFM / NXT / M111 / PTFE graphite T_{max} 250°C / 482°F
- PTFE-P / NFCE / NCS T_{max} 320°C / 608°F
- other sleeve materials on request

The data given are max. values according to ASME B16.34.

IMPORTANT NOTE

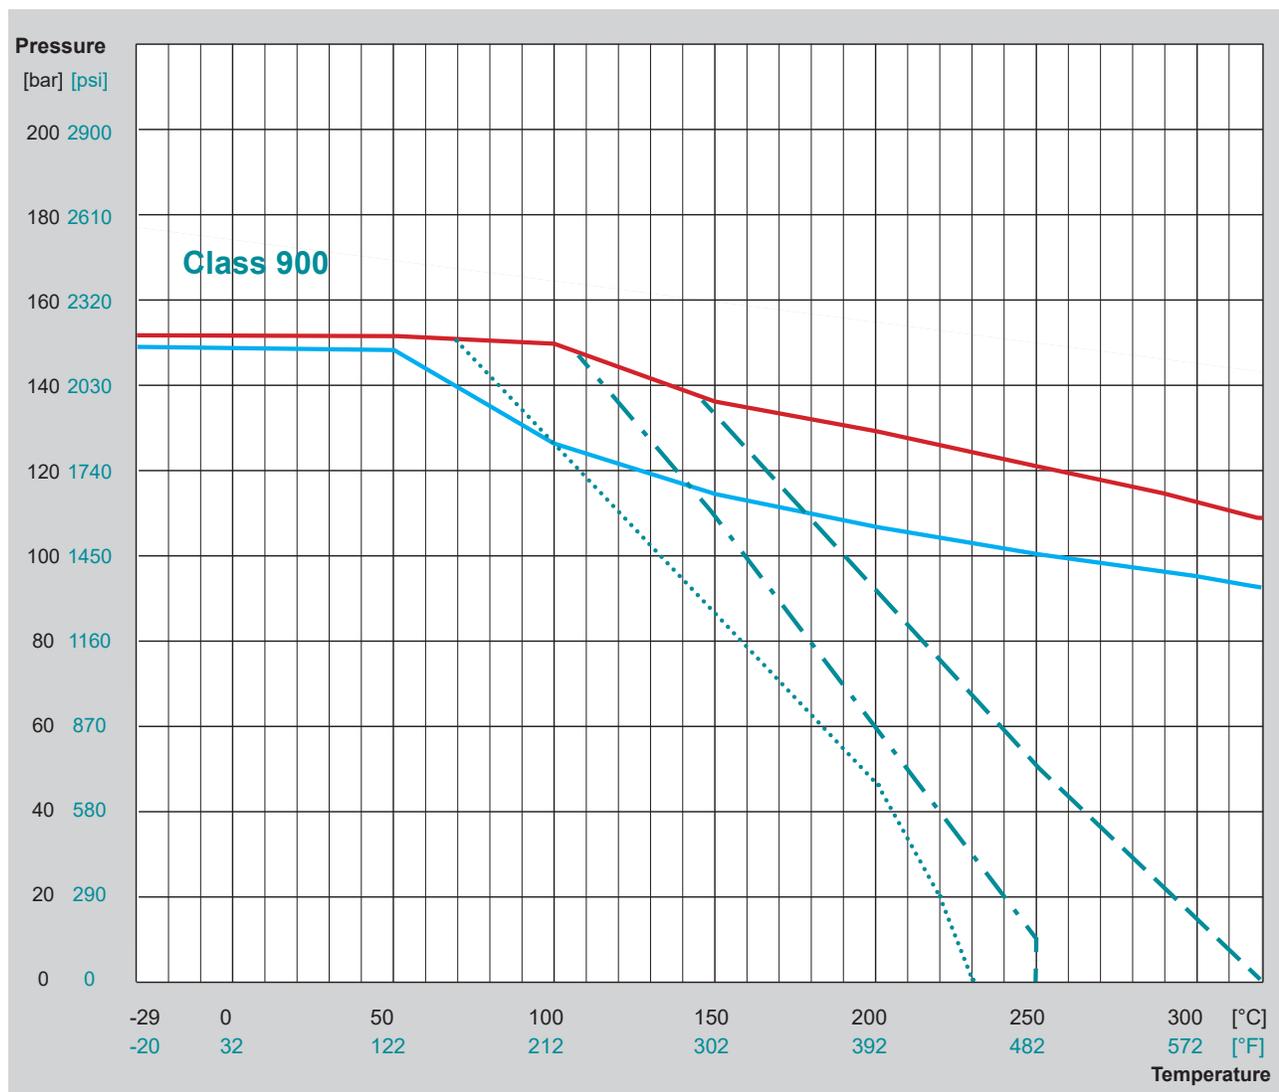
for demanding conditions, such as process temperatures exceeding 200°C / 392°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of sleeve material, cover sealing type and special features.

For temperatures < -29°C / -20°F, ($T_{limit} = -60°C / -76°F$) operating temperature, low-temperature carbon steel or austenitic stainless steels are required.

Subject to technical change without notice.

PT Diagram High Pressure - Class 900

PTFE sleeved plug valves with trunnion mounted design



Body material (in line with ASME B16.34)

- ASTM A351 - CF8M / Stainless Steel
- ASTM A995 - CD3MN / Superduplex
- other body materials on request

Sleeve material

- ⋯ PTFE (virgin) / PTFE (glass) T_{max} 230°C / 446°F
- · - · TFM / NXT / M111 / PTFE graphite T_{max} 250°C / 482°F
- - - PTFE-P / NFCE / NCS T_{max} 320°C / 608°F
- other sleeve materials on request

The data given are max. values according to ASME B16.34.

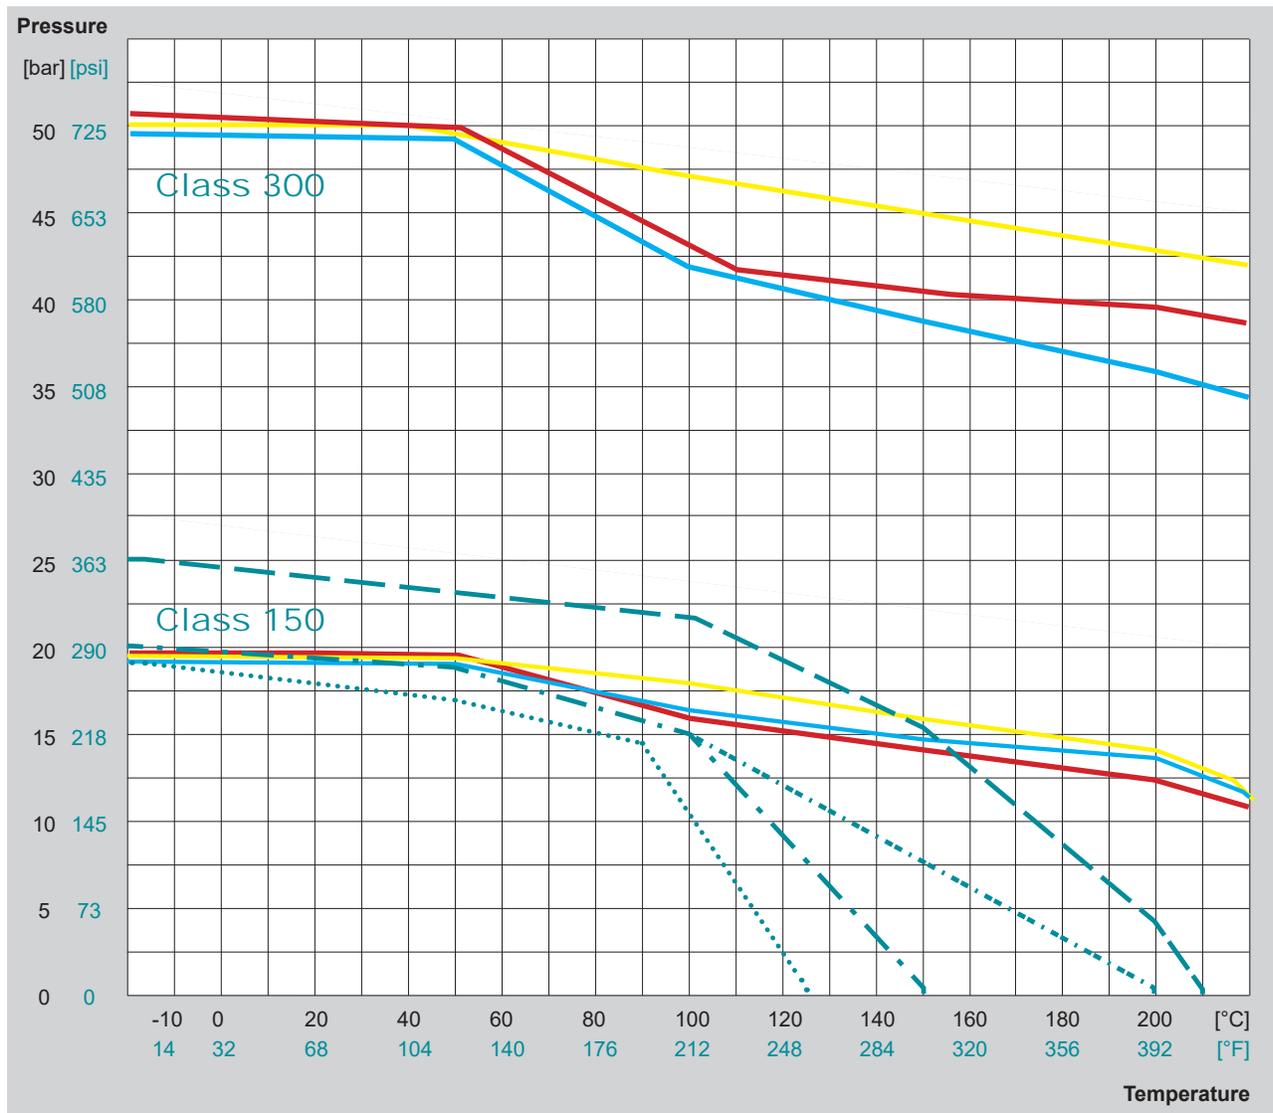
IMPORTANT NOTE

for demanding conditions, such as process temperatures exceeding 200°C / 392°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of sleeve material, cover sealing type and special features.

Subject to technical change without notice.

For temperatures < -29°C / -20°F, ($T_{limit} = -60°C / -76°F$) operating temperature, low-temperature carbon steel or austenitic stainless steels are required.

PT Diagramm, Class 150 - Class 300 lined valves



Body material

- ASTM A216 - WCB
- - - ASTM A351 - CF8M / Stainless Steel
- · · · ASTM A395 / Ductile Iron
- other body materials on request

Lining combination

	Body	Plug / Ball	T _{MAX}
—	PFA	PTFE or special*	210°C / 410°F
- - -	PFA	PFA	200°C / 392°F
· · · ·	all combinations with PFA and FEP		150°C / 302°F
· · · ·	PFA conductive	PFA conductive**	125°C / 257°F

*) Special materials (metallic) for plugs without lining on request

**) Material combination PFA / FEP possible

The data given are max. values according to EN 12516-4.

IMPORTANT NOTE

for demanding conditions, such as process temperatures exceeding 150°C / 302°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of lining material, cover sealing type and special features.

Maximum breakaway torque depending on material combinations according to the technical data sheets of the plug valve.
Subject to technical change without notice.



Plug types: two-way and multi-way for standard reduced and full bore design



- position indicator for all multi-way valves welded on lever or stem extension
- Lined plug valves: multi-way plugs only with PFA / FEP plug lining or made of special materials. Two-way plugs with PTFE lining up to DN 100 / NPS 4 available

Recommendation for three-way valves type F-3-S with vertical outlet (longer life-time compared to type F-3-W with horizontal outlet)












Options








Plugs made of special materials or special designs, e.g. with flushing devices, vent holes in plug bottom or plug upstream / downstream side

2-way	Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°
<p>Type F-2-ISO-STANDARD</p>	<p>D</p>				
<p>Type F-2-ISO-STANDARD-A</p>	<p>T4*</p>				

*) For highly expanding media AZ recommends the "i-plug" (relief hole and open plug bottom)

Plug types: 3-way valve for STANDARD and EXTRA design

Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°	3-way (vertical)
L 					 Type F-3-S-ISO-STANDARD
LL 					 Type F-3-S-ISO-STANDARD-A
IL* 					
TT 					



Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°	3-way (horizontal)
T4 					 Type F-3-W-ISO-STANDARD
L4 					 Type F-3-W-ISO-STANDARD-A

*) for EXTRA valves with IL-plug, F-3-W-EXTRA with T4-plug is recommended (higher flowrate)
Lined valves: the IL-plug is only available in special materials

Plug types 3-way (120°) valves and 4-way valves for STANDARD and EXTRA design



3-way (120°) type 3-W-120:

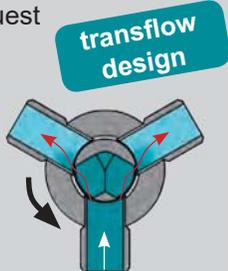- min. cross section guaranteed (switching phase)
- piggable execution on request
- minimum flow guaranteed



3-way (120°) type 3-WP-120

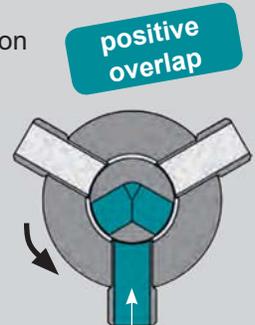- with positive overlap
- flow interruption / isolation



























3-way (120°)	Plug type	Pos. I = 0°	Pos. II = 120°	Pos. III = 240°	
	L120 				

4-way	Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°
	L4 				
Type F-4-ISO-STANDARD 	T4 				
	LL4 				

opened
 closed

Plug types 4-way (special) and 5-way valves for STANDARD and EXTRA design

Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°	4-way (special) / 5-way
L 	 A B C ✓ A-B ✗ C-D-E	 A B C ✓ A-E ✗ B-C-D	 A B C ✓ A-C ✗ B-D-E	 A B C ✓ A-D ✗ B-C-E	 Type F-4-Special-ISO-STANDARD    Type F-5-ISO-STANDARD  
LL 	 A B C ✓ A-B-E ✗ C-D	 A B C ✓ A-C-E ✗ B-D	 A B C ✓ A-C-D ✗ B-E	 A B C ✓ A-B-D ✗ C-E	
IL 	 A B C ✓ A-E + B-C ✗ D	 A B C ✓ A-C + D-E ✗ B	 A B C ✓ A-D + B-C ✗ E	 A B C ✓ A-B + D-E ✗ C	
T 	 A B C ✓ A-B-C ✗ D-E	 A B C ✓ A-D-E ✗ B-C	 A B C ✓ A-B-C ✗ D-E	 A B C ✓ A-D-E ✗ B-C	
TT 	 A B C ✓ A-B-C-D ✗ E	 A B C ✓ A-B-D-E ✗ C	 A B C ✓ A-B-C-E ✗ D	 A B C ✓ A-C-D-E ✗ B	

 opened
 closed



AZ plants

Headquarters Germany

AZ Armaturen GmbH
Waldstrasse 7
D-78087 Moenchweiler
Phone: +49 / 7721 / 7504-0
sales@az-armaturen.com
www.az-armaturen.com

Plant USA

AZ VALVES North America L.P.
18702 Intercontinental Crossing Drive
Houston, TX 77073
Phone: +1 / 832 / 827 2163
sales@azvalves.com
www.azvalves.com

Plant Brazil

AZ Armaturen do Brasil LTDA.
Av. Osvaldo Berto, 600
CEP 13255-405 Itatiba - SP
Phone: +55 / 11 / 452499-50 / -51
az@az-armaturen.com.br
www.az-armaturen.com.br

Plant China

AZ Armaturen (Taicang) Co., Ltd.
No. 1 Zhengzhou Road
215400 Taicang City
Phone: +86 / 512 / 53667600
info@az-armaturen.cn
www.az-armaturen.cn

Plant South Africa

AZ Armaturen South Africa PTY LTD.
28 Derick Coetzee Street
Boksburg 1459
Phone: +27 / 11 / 3973665
sales@az-armaturen.co.za
www.az-armaturen.co.za

AZ services

America

- USA (Houston/TX)
- Brazil (São Paulo, Itatiba & Belem)
- Chile (Santiago de Chile)
- Mexico (Mexico-City)
- Peru (Lima)

Europe

- Germany (Moenchweiler & Rhineland)
- France (Lyon/ Bourg-lès-Valence)
- Great Britain (York/Roecliffe)
- Italy (Milan/Caltignaga)
- Poland (Warsaw/Opoczno)
- The Netherlands (Amsterdam)

Asia

- China (Taicang)
- South Korea
- Thailand (Rayong)
- Vietnam (Hanoi)

Africa

- South Africa (Johannesburg)



Detailed addresses
on our website

www.azvalves.com