


## Type FASA

Fast acting actuator for high performance applications

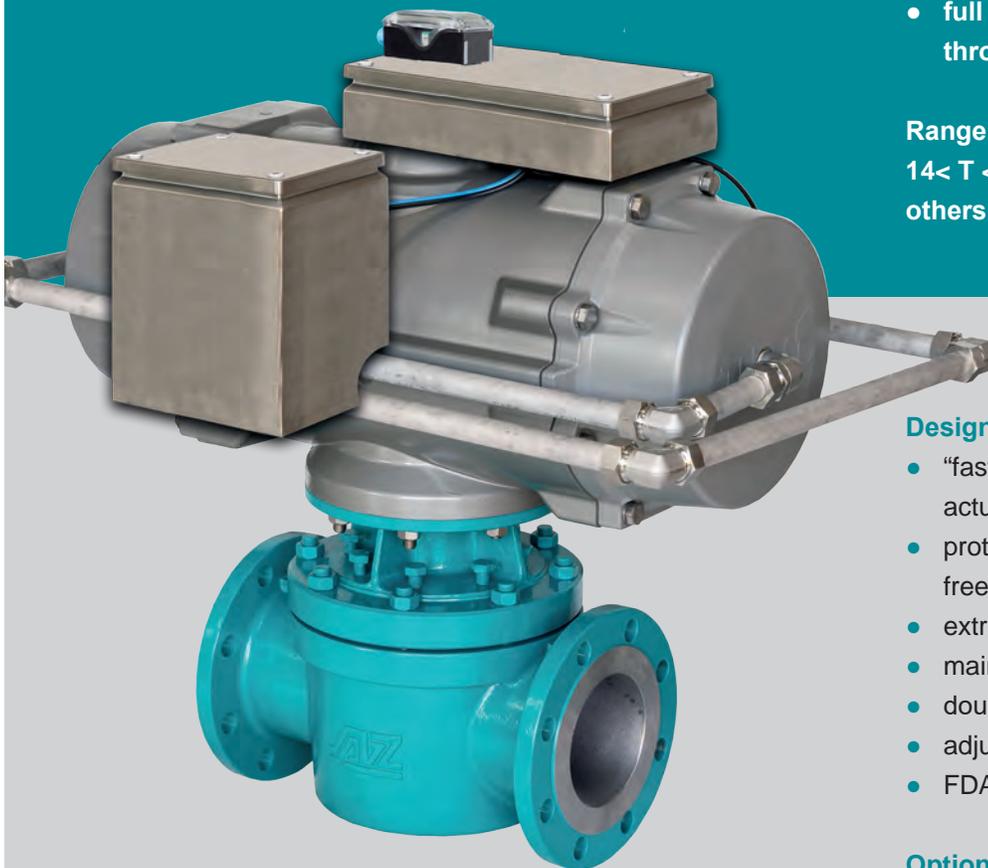

- fast opening / fast closing  
< 1 sec
- full bore valve for maximum  
throughput

Range of application:

14 < T < 194°F

others on request

### Design characteristics

- “fast acting” double/single acting  
actuator
- protected sealing areas –  
free of cavities
- extra long durability
- maintenance-free
- double shut-off sealing
- adjustable
- FDA conformity

### Options

- painting
- flushing device
- heating jacket
- oil and grease-free assembling
- piggable

Time of closing / opening < 1 sec.  
 e.g. for full bore plug valve for steam peeling processes

