


# Type KSV

## Stem extension (sliding T-wrench)

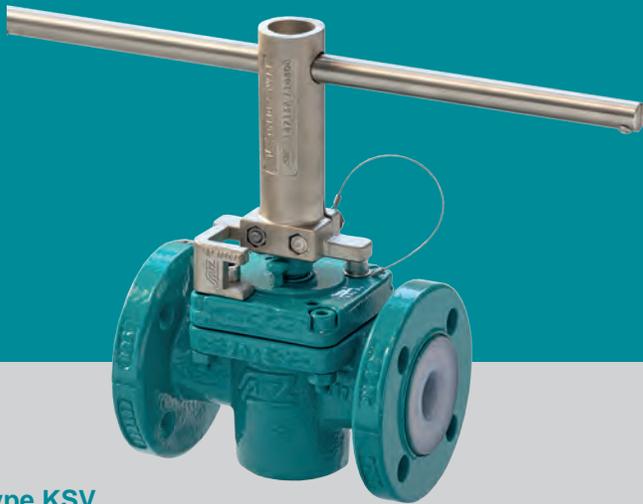

Type KSV

- applicable for all AZ valves
- standard extension  
100 mm / 4" or 150 mm / 6"



Type KSV-VR

Locking Device at the top

### Design characteristics

- solid construction made of stainless steel 1.4308, ASTM A351 CF8
- simple mounting
- for extended operation
- for thick-walled insulation
- push-through in tight spaces conditions
- two-hand operation

### Options

- special material
- other heights
- locking device
- plunger arrestor




Type KSV-P

with plunger arrestor

# Type KSV

## Technical information

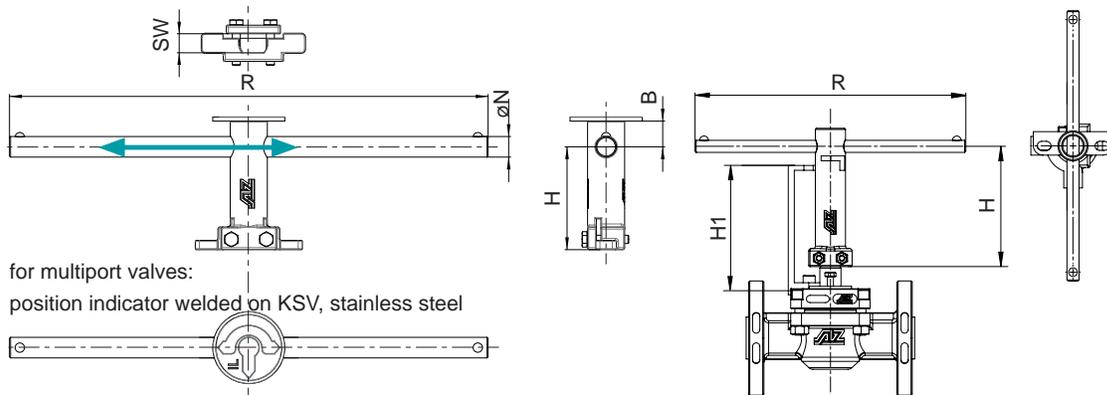

| valve size<br>[DN]<br>[NPS] | B<br>[mm]<br>[Inch] | SW<br>[mm]<br>[Inch] | H (KSV)<br>[mm]<br>[Inch] | H (KSV-VR)<br>[mm]<br>[Inch] | H1<br>[mm]<br>[Inch] | øN<br>[mm]<br>[Inch] | R<br>[mm]<br>[Inch] |
|-----------------------------|---------------------|----------------------|---------------------------|------------------------------|----------------------|----------------------|---------------------|
| 15                          | 15                  | 11                   |                           |                              |                      |                      |                     |
| ½                           | 0.591               | 0.433                | 100/150*                  | 100*                         | 103                  | 10                   | 225                 |
| 15E                         | 15                  | 11                   | 4/6*                      | 4*                           | 4.06                 | 0.39                 | 8.86                |
| ½E                          | 0.591               | 0.433                |                           |                              |                      |                      |                     |
| 20                          | 15                  | 11                   |                           |                              |                      |                      |                     |
| ¾                           | 0.591               | 0.433                | 100/150*                  | 100*                         | 103                  | 10                   | 225                 |
| 20E                         | 15                  | 11                   | 4/6*                      | 4*                           | 4.06                 | 0.39                 | 8.86                |
| ¾E                          | 0.591               | 0.433                |                           |                              |                      |                      |                     |
| 25                          | 15                  | 11                   |                           |                              | 103                  | 10                   | 225                 |
| 1                           | 0.591               | 0.433                | 100/150*                  | 100*                         | 4.06                 | 0.39                 | 0.39                |
| 25E                         | 20                  | 14                   | 4/6*                      | 4*                           | 109                  | 15                   | 360                 |
| 1E                          | 0.787               | 0.551                |                           |                              | 4.29                 | 0.55                 | 14.17               |
| 32                          | 20                  | 14                   |                           |                              | 97                   | 15                   | 360                 |
| 1¼                          | 0.787               | 0.551                | 100/150*                  | 100*                         | 3.82                 | 0.55                 | 14.17               |
| 32E                         | 25                  | 19                   | 4/6*                      | 4*                           | 109                  | 20                   | 465                 |
| 1¼E                         | 0.984               | 0.749                |                           |                              | 4.29                 | 0.79                 | 18.31               |
| 40                          | 20                  | 14                   |                           |                              | 97                   | 15                   | 360                 |
| 1½                          | 0.787               | 0.551                | 100/150*                  | 100*                         | 3.82                 | 0.55                 | 14.17               |
| 40E                         | 25                  | 19                   | 4/6*                      | 4*                           | 109                  | 20                   | 465                 |
| 1½E                         | 0.984               | 0.749                |                           |                              | 4.29                 | 0.79                 | 18.31               |
| 50                          | 25                  | 19                   |                           |                              | 109                  | 20                   | 465                 |
| 2                           | 0.984               | 0.749                | 100/150*                  | 100*                         | 4.29                 | 0.79                 | 18.31               |
| 65                          | 25                  | 22                   | 4/6*                      | 4*                           | 106                  | 25                   | 665                 |
| 2½                          | 0.984               | 0.866                |                           |                              | 4.17                 | 0.984                | 26.18               |
| 80                          | 25                  | 22                   | 100/150*                  | 100*                         | 106                  | 25                   | 665                 |
| 3                           | 0.984               | 0.866                | 4/6*                      | 4*                           | 4.17                 | 0.984                | 26.18               |
| 100 / 100S                  | 25                  | 22                   | 100/150*                  | 100*                         |                      | 25                   | 665                 |
| 4 / 4S                      | 0.984               | 0.866                | 4/6*                      | 4*                           |                      | 0.984                | 26.18               |

\*) Standard heights 4 or 6", others on request