


AB 2000

Plug valve with chemical-resistant, vacuum-proof lining, with exchangeable PTFE- Sleeve with ISO top flange

DIN-EN: DN 15 - 300 / PN 10 - 40

ASME: NPS ½" - 12" / class 150 - 300

PT range: $-30 < T < 210^{\circ}\text{C}$, vacuum tight

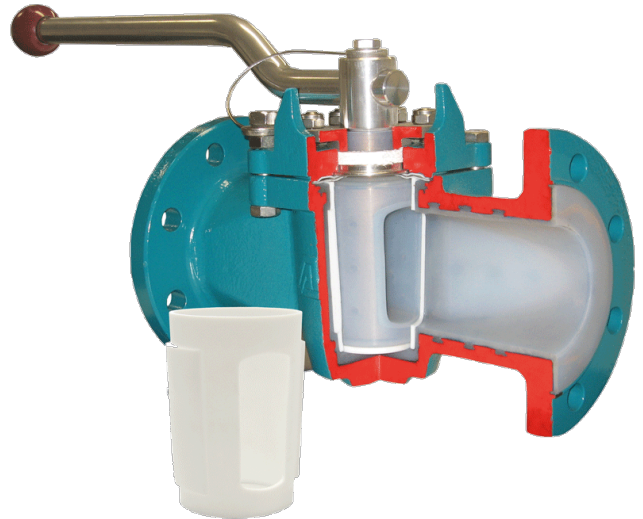


Design Features

Design Characteristics

- with exchangeable PTFE sleeve
- easy on-site repairing possible
- reduced operating torque
- economic automation
- free of cavities
- maintenance free - self lubricating
- mounting-flange for actuators acc. to DIN ISO 5211
- easy accessible adjustment of the plug, even with mounted actuator
- with chemical resistant lining - thickness min. 3 mm vacuum tight
- fugitive emission resp. clean air act certified (TA - Luft 2002 approval)
- Directive 2014/68/EU
- FDA conformity

PT-Diagramm

General Pressure-Temperature-Diagram

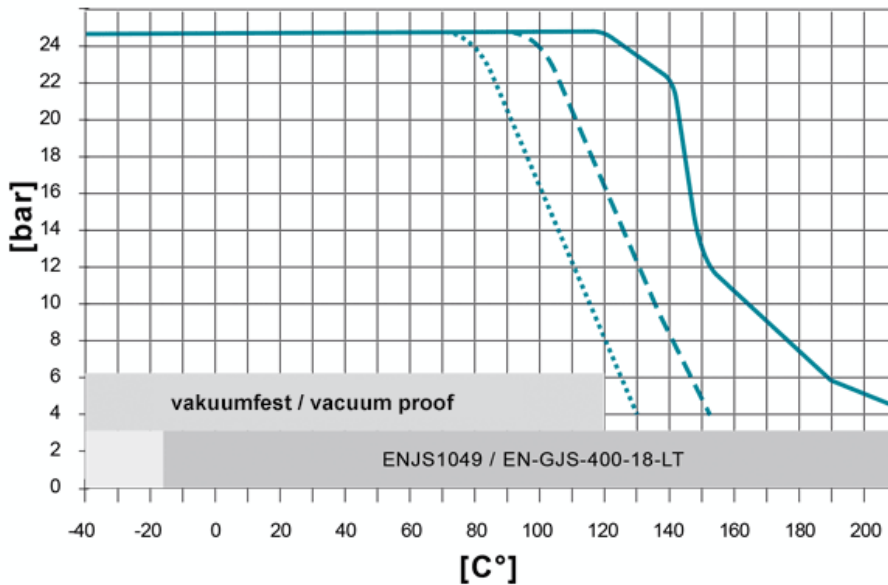

Lining materials		Tmax
Body	Plug	
PFA	PTFE	210°C
PFA/FEP	PFA	150°C
PFA	Special material	210°C
PFA cond.	PFA conductive	125°C

Standard lining materials::
PFA (body) and PTFE (plug)

Lining materials Body / Plug

- PFA or FEP / PTFE
- - - PFA / PFA
- ⋯ PFA / FEP

The specified values depend on the respective application (medium). Operating temperatures under -20°C only with body material 1.4408 or low-temperature steel. High pressure resistance / temperature resistance on request, e.g. PN 40.

Sleeve: There are different sleeve materials / compounds available.

Materials

Standard body materials

- Ductile cast iron ENJS 1049, ASTM Gr 60-40-18 / A395

Standard plug materials

- Stainless Steel 1.4308, ASTM A351 CF8
- Ductile cast iron ENJS 1049, ASTM Gr 60-40-18 / A395

Special materials

- Carbon Steel 1.0619, ASTM A216 WCB
- Stainless Steel 1.4408, ASTM A351 CF8M
- Unalloyed stainless steel casting (low Temp.) 1.1138, LCC/LCB/A352

Lining materials

- Body: PFA, PFA-conductive, FEP
- Plug: PTFE, PFA, PFA-conductive, FEP


Sealing Systems

Chemical sealing to prevent fugitive emission of aggressive and toxic media
with PTFE packing for additional stem sealing; T_{\max} 230°C

Type CA

[read more \[...\]](#)


Port Forms

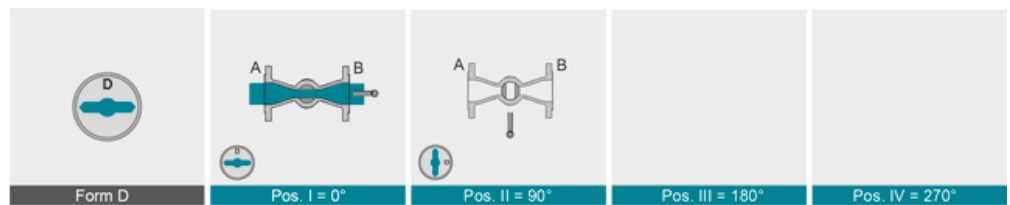

Dimensions

on request

Actuation

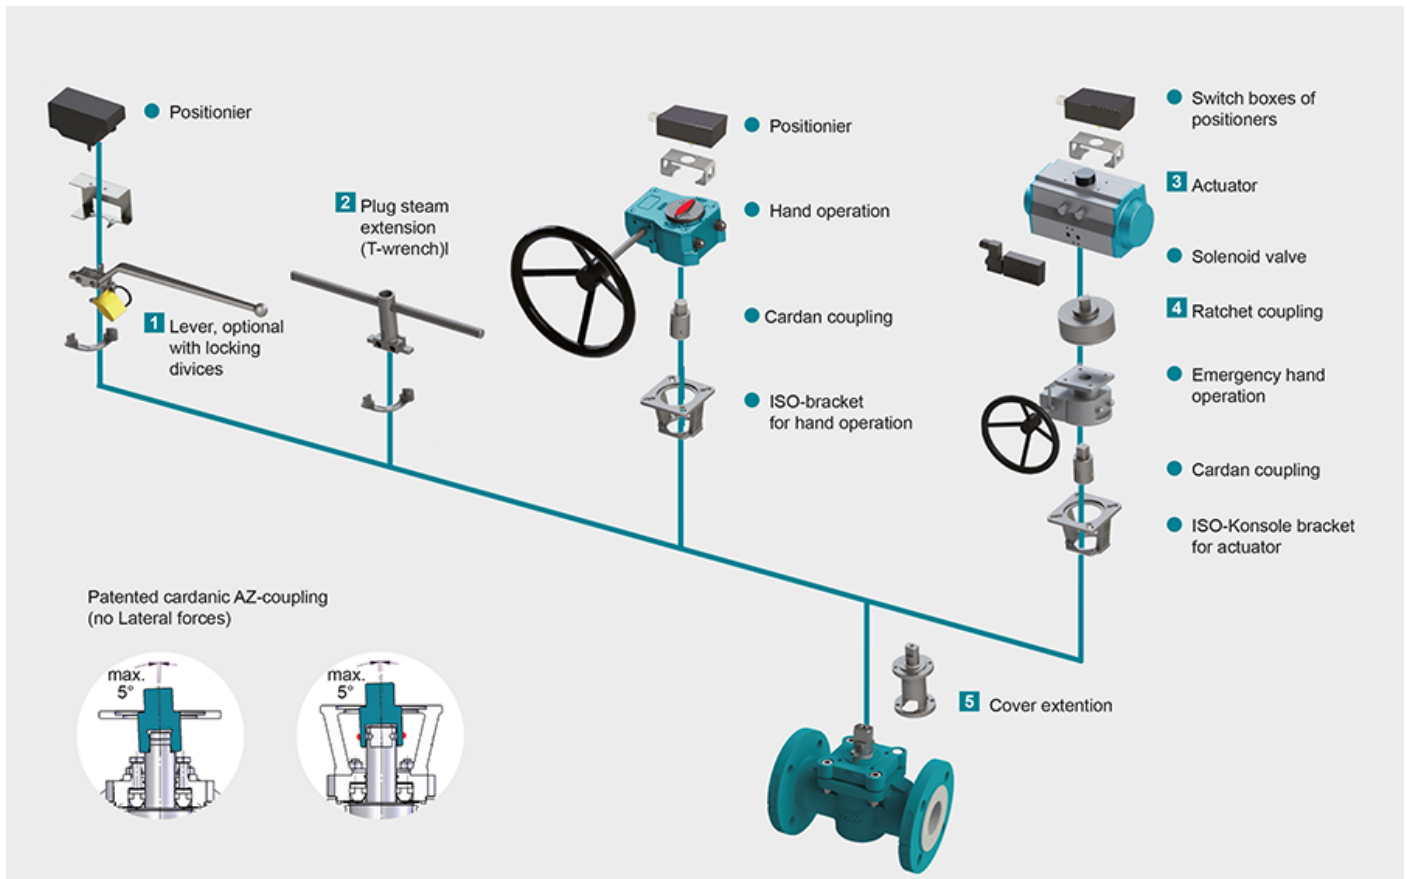

1 Locking Devices

Pilot valve combinations, pad lock eyelets, linear key conception, indexing plunger arrestor.
[read more \[...\]](#)

2 Plug stem extension

Solid construction in stainless steel with T-wrench, Standard extension 100 mm or 150 mm, non standard lengths are available on request
[read more \[...\]](#)

3 Actuators

Actuators for mounting-flange acc. to DIN ISO 5211
[read more \[...\]](#)

NEW: Pneumatic actuator AIR GEAR for plug valves with high torque ≥ 150.000 Nm
[read more \[...\]](#)

4 Ratched coupling

To usw on multiport valves with standard 90° actuator for bigger switchpositions than 90°
[read more \[...\]](#)

5 Cover extension

Solid construction in stainless steel, Standard extension 100 mm or 150 mm high, non standard lengths are available on request . Hexagonal bolts on adjustment ring freely accessible. Note: Don't use with sealing FSN/FSN-SL and CASN/CASN-SL
[read more \[...\]](#)