

# VARIO

## Samplingsystem for liquids, freely definable sample quantity

DIN-EN: DN 15 - 100 / PN 10 - 40

ASME: NPS ½" - 4" / class 150 - 300

PT range:  $-40 < T < 230^{\circ}\text{C}$ , vacuum  $10^{-8}$  mbar




## Design Features

### Design Characteristics


- closed system
- cavity free
- freely definable representative sample quantity
- pressure free sampling (positive overlap)
- spilling eliminated and contamination free
- simple and safe operation
- absolutely tight
- compact design
- multiple sampler combined
- fugitive emission resp. clean air act certified (TA - Luft 2002 approval)
- Directive 2014/68/EU

### Functional Principle

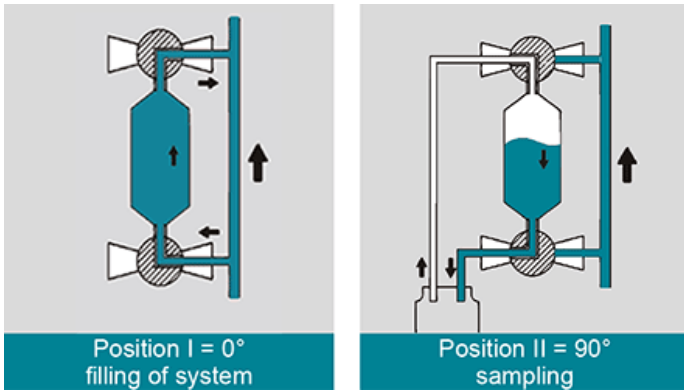


### Bottle connection

- PTFE-Adapter: for laboratory bottle with ISO-thread GL 32/45. Application: For less toxic resp. polluted media.
- Clamping Retainer: For fast and easy exchange of laboratory bottle, even for heated version.
- Needle system: closed needle system for laboratory bottle with septum (Butyl and PTFE). Needle System NH and NH-S with diverse internal diameter(2-6 mm). Application for high toxic resp. polluted media for spillnig eliminated an contamination free sampling.

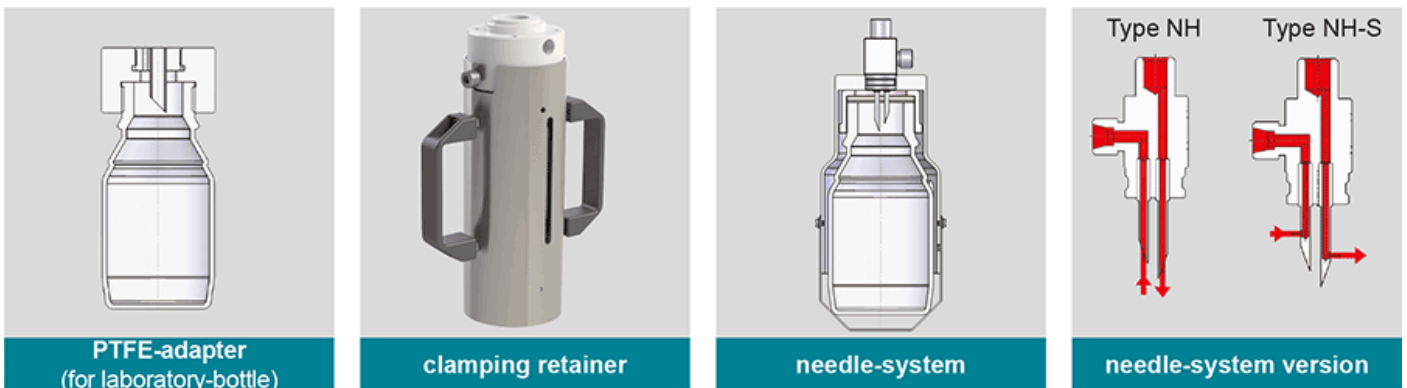

### PT-Diagram

General Pressure-Temperature-Diagram

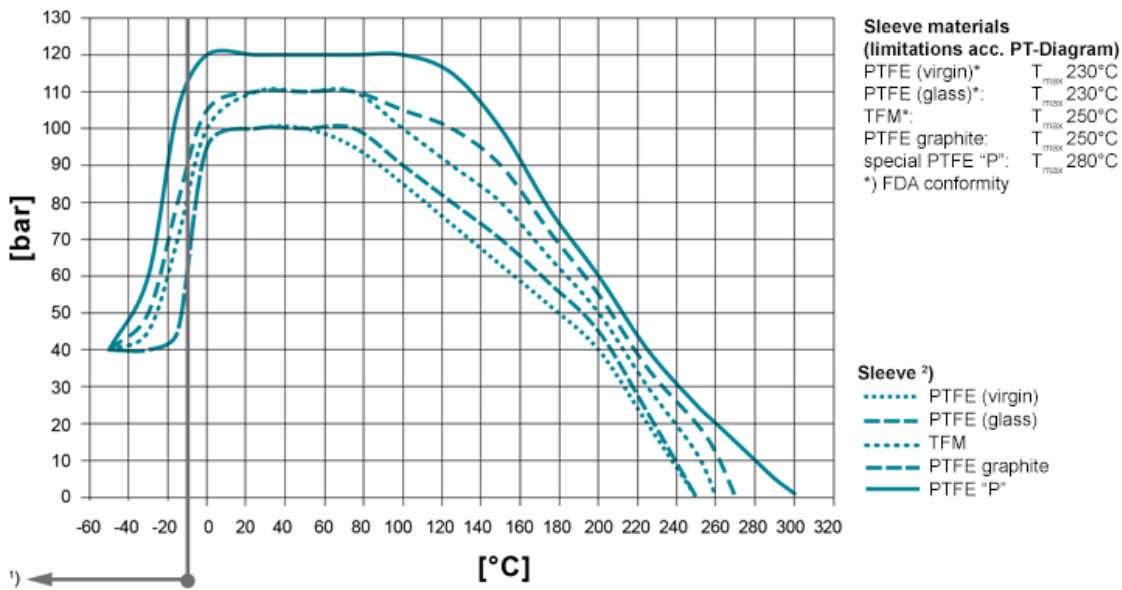

**Operating temperatures < -30°C and > 220 °C have to be checked and approved by AZ according to the operating conditions.**

Besides the P/T value of the sleeve the limitations of the valve bodies also have to be considered. Please refer to the EN 12516-1 resp. ASME B16.34 in order to choose a proper pressure rating (PN/class). The shown values refer to austenitic stainless steel 1.4408 (A351 Gr. CF8M).

- 1) For operating temperatures below -10°C low temperature / austenitic steels are required.
- 2) Sleeve: There are different sleeve materials / compounds available.

## Materials

### Standard body materials

- Carbon Steel 1.0619, ASTM A216 WCB
- Stainless Steel 1.4408, ASTM A351 CF8M
- Stainless Steel 1.4308, ASTM A351 CF8
- Unalloyed stainless steel casting (low Temp.) 1.1138, LCC/LCB/A352

### Standard plug materials

- Stainless Steel 1.4408, ASTM A351 CF8M
- Stainless Steel 1.4308, ASTM A351 CF8

### Special materials

- Alloy
- Monel
- Nickel

- Zirconium
- Titan
- Tantal
- other materials on request

## Sealing Systems

Standard sealing for all major applications;

T<sub>max</sub> 230°C

### Type STD

[read more \[...\]](#)

Firesafe sealing (API 607) with graphite packing for additional stem sealing; T<sub>max</sub> 230°C

### Type FS

[read more \[...\]](#)

Chemical sealing to prevent fugitive emission of aggressive and toxic media with PTFE packing for additional stem sealing;

T<sub>max</sub> 230°C

### Type CA

[read more \[...\]](#)

Firesafe safety sealing (API 607) for fluctuating temperatures

with 3x graphite packing (adjustable) for additional stem sealing; T<sub>max</sub> 280°C

### Type FSN

[read more \[...\]](#)

Firesafe safety sealing (API 607) for fluctuating temperatures

with 3x graphite packing (live loaded disc springs) for additional

stem sealing; T<sub>max</sub> 280°C

### Type FSN-SL

[read more \[...\]](#)

Chemical safety sealing for fluctuating temperatures with 3x PTFE packing (adjustment) for additional stem sealing;

T<sub>max</sub> 230°C

### Type CASN

[read more \[...\]](#)

Chemical safety sealing for fluctuation temperatures

with 3x PTFE packing (live loaded disc springs) for additional stem sealing; T<sub>max</sub> 230°C


### Type CASN-SL

[read more \[...\]](#)


## Port Forms

on request

## Dimensions

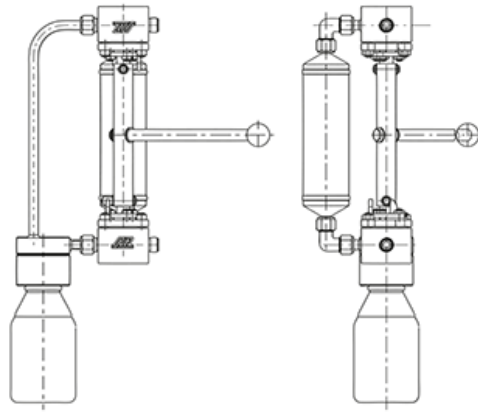

## Actuation

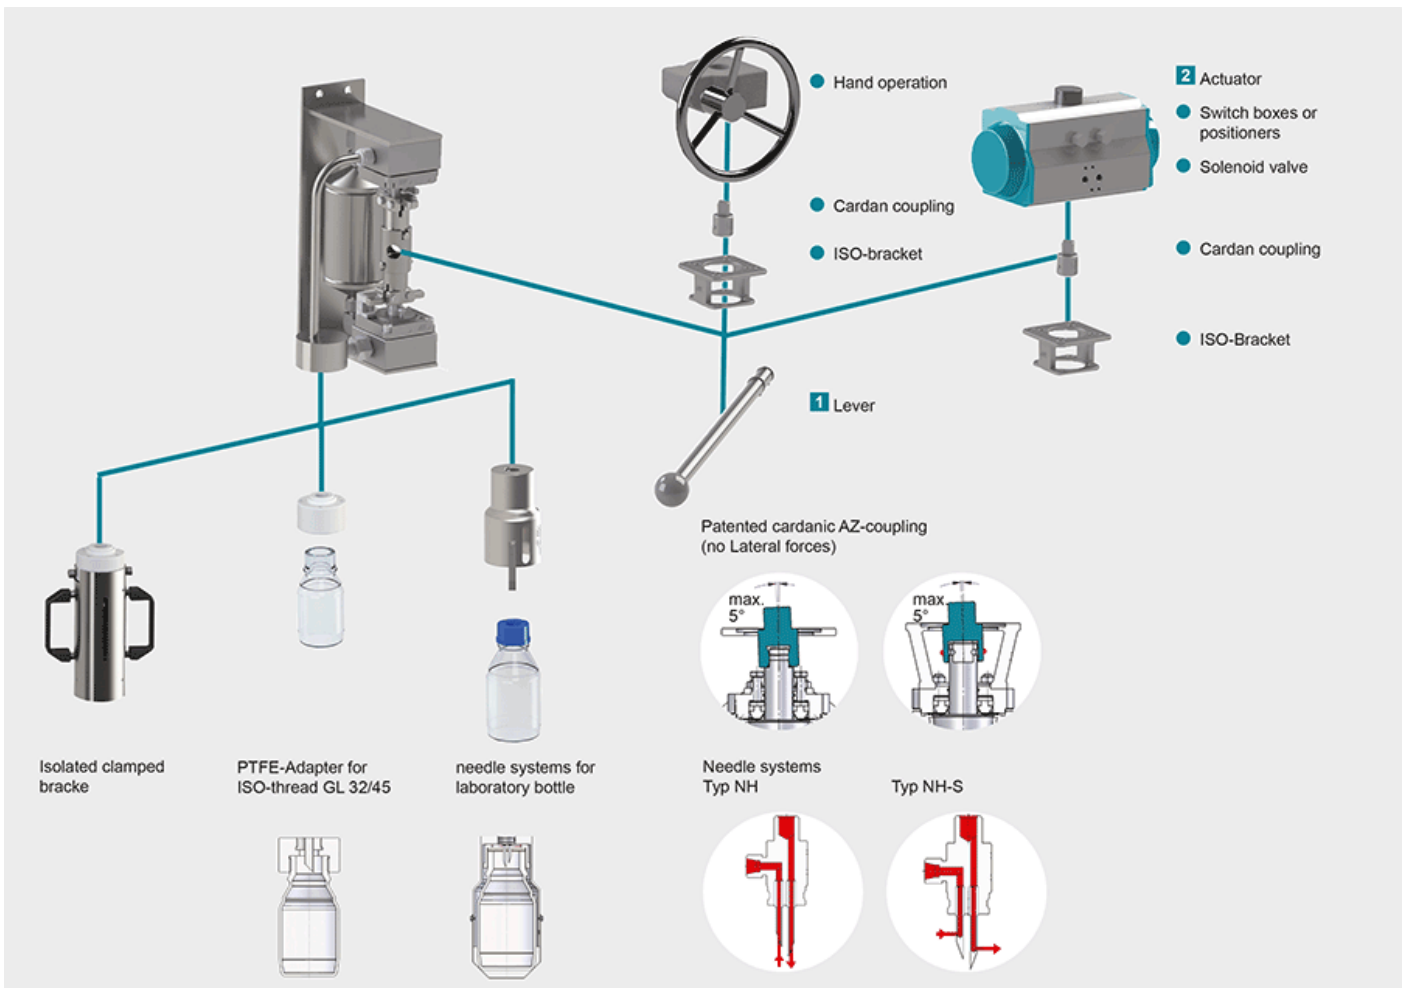

## 1 Locking Devices

Pilot valve combinations, pad lock eyelets, linear key conception, indexing plunger arrestor.

[read more \[...\]](#)

## **2 Actuators**

Actuators for mounting-flange acc. to DIN ISO 5211

[read more \[...\]](#)